



GE APPLIANCES
a Haier company

Standard Package



Model#: PYE22KYNFS

GE Profile™ Series ENERGY STAR® 22.1 Cu. Ft. Counter-Depth French-Door Refrigerator with Hands-Free



Approx Dimensions (HxDxW):
69 7/8 in X 31 1/4 in X 35 3/4 in

- Fingerprint resistant stainless - Easily wipe away smudges and fingerprints for a look that's always sparkling clean
- Counter-depth design - Offers a built-in look by fitting nearly flush with surrounding cabinetry
- Hands-free Autofill - Lets you walk away while the dispenser automatically fills any container with filtered water
- Full-width electronic temperature-controlled drawer with LED lights - 3 accurate settings deliver the optimal temperature for your favorite foods



Model#: PTS7000SNSS

GE Profile™ 30" Smart Built-In Convection Single Wall Oven



Approx Dimensions (HxDxW):
28 5/8 in X 26 3/4 in X 29 3/4 in

- Fit Guarantee - Replacing a similar wall oven from GE Appliances or another brand? GE wall ovens are guaranteed for an exact fit or GE Appliances will pay up to \$300 toward modifications.
- Precision cooking modes - Skip the oven hover, even when cooking the most intricate dishes, thanks to advanced technology that provides step-by-step instructions and automatic adjustments to oven temperatures and cook times for perfect results



Model#: PP9036SJSS

GE Profile™ 36" Built-In Touch Control Cooktop

Approx Dimensions (HxDxW):
5 9/16 in X 20 1/2 in X 36 1/8 in

- Fit Guarantee - Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications.
- Five radiant cooking elements - Cook foods quickly and evenly on this sleek, glass surface
- Glide touch controls - Precisely control heat instantly and easily with one swipe



Model#: JVW5361SJSS

GE® 36" Wall-Mount Pyramid Chimney Hood

Approx Dimensions (HxDxW):
9 7/8 in X 18 1/2 in X 36 in

- Easy do-it-yourself Installation -
- 350-CFM venting system with boost - Effectively remove smoke, grease, odor and moisture
- Electronic backlit controls - Add a sophisticated look with this up-front, easy-to-use display
- Dual halogen cooktop lighting - Enjoy better visibility with a brightly lit cooktop and surrounding surface



Model#: PWB7030SLSS

GE Profile™ Built-In Microwave/Convection Oven

Approx Dimensions (HxDxW):
19 1/8 in X 24 3/4 in X 29 7/8 in

- 1.7 cu. ft. capacity - 975 microwave watts (IEC test procedure) and 1500 convection watts
- Convection cooking - Choose this setting when baking or browning is desired
- Combination Fast Cook setting - Combining microwave and radiant heat for speed
- Steam sensor - Perfectly prepare your steamed favorites



GE APPLIANCES
a Haier company

Standard Package



Model#: PEB9159SJSS

**GE Profile™ 1.5 Cu. Ft.
Countertop
Convection/Microwave Oven**

Approx Dimensions (HxDxW):
13 in X 20 in X 21 3/4 in


- 1.5 cu. ft. capacity - 1000 Watts (IEC-705 test procedure)
- Convection cooking - Choose this setting when baking or browning is desired
- Sensor cooking controls - Automatically adjusts time and power for delicious cooking results
- Warming oven - Keeps prepared foods warm and fresh, and retains superb moistness and crispness



Model#: JX9153SJSS

**Microwave Optional 30" Built-In
Trim Kit**

- Get a custom appearance for your microwave with the GE Deluxe 30 in. Built-In Microwave Trim Kit in Stainless steel
- With a timeless look, this trim kit is ideal for the home or office to be enjoyed for years and years to come. It is intended for the 1.5 cu. ft. microwave oven



Model#: PDT775SYNFS

**GE Profile™ Smart Stainless Steel
Interior Dishwasher with Hidden
Controls**



Approx Dimensions (HxDxW):
34 in X 24 in X 23 3/4 in

- Twin Turbo Dry Boost - Ensure a complete dry with every cycle, thanks to a dual fan system and inline heater that provide exceptional performance, even with plastics.
- WiFi Connect - Monitor cycle status, check rinse aid levels and automatically reorder detergent using your mobile device
- Deep Clean Silverware Jets - No matter how you load your silverware basket, powerful jets blast away stuck-on food for silverware that's always spotless
- Leak Defense with Active Flood Protect - Uncommon leaks can be easily detected and contained



Model#: GDT226SSLSS

GE® Built-In Dishwasher

Approx Dimensions (HxDxW):
32 1/4 in X 23 1/2 in X 23 3/4 in


- ADA Compliant with Low-Profile Installation - Great for 34" counter top heights and raised subfloors
- 3-Level Wash - Expect exceptionally clean table-ready dishes with powerful wash arms
- Autosense Cycle - A beam of light measures soil levels and water temperature to adjust to the ideal cycle time
- Piranha™ hard food disposer with removable filter - To ensure consistently clean items, this stainless steel blade rotates at 3,600 RPM to pulverize food particles and helps to prevent large particles from clogging the wash arms

PYE22KBL/KEL/KMK/KSK/KYN

GE Profile™ Series ENERGY STAR® 22.1 Cu. Ft. Counter-Depth French-Door Refrigerator

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

Height to top of door (in.) A	70-1/2
Height to top of hinge (in.) B	69-7/8
Height to top of case (in.) C	69
Case depth without door (in.) D	24-3/8
Case depth less door handle (in.) E	29-3/4
Case depth with door handle (in.) F	31-1/4
Depth with fresh food door open 90° (in.) G	43-3/8
Width (in.) H	35-3/4
Width with door open 90° with door handle (in.) I	44-5/8
Width with doors open fully (in.) J	68
Min distance between side of case and wall, in either direction, to allow doors to open fully (in.) K	16-1/8
Depth with FZ door completely open (w/o handle) (in.) X	44-3/4
Depth with FZ door completely open (w/ handle) (in.) Y	46-1/4

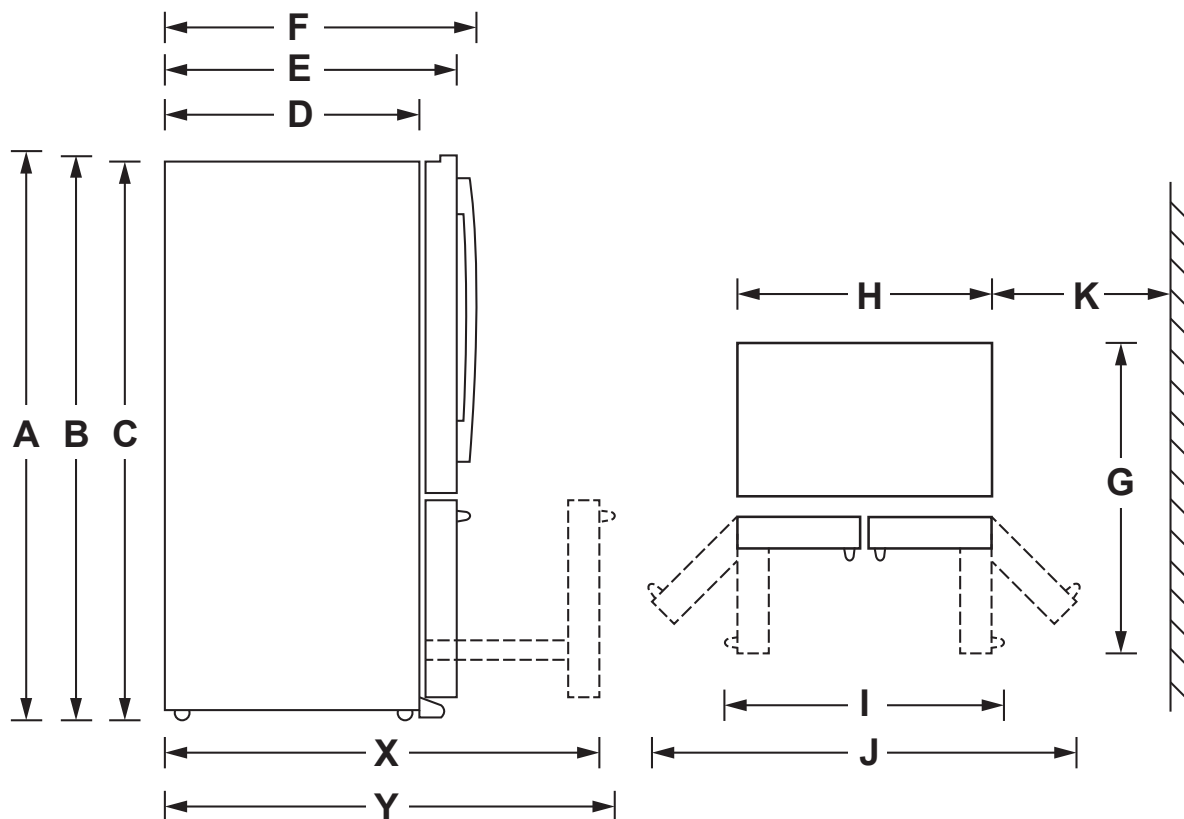

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

PYE22KBL/KEL/KMK/KSK/KYN

GE Profile™ Series ENERGY STAR® 22.1 Cu. Ft. Counter-Depth French-Door Refrigerator

FEATURES AND BENEFITS

Counter-depth design – Offers a built-in look by fitting nearly flush with surrounding cabinetry

Hands-free Autofill – Lets you walk away while the dispenser automatically fills any container with filtered water

Full-width, electronic temperature-controlled drawer with LED lights – 3 accurate settings deliver the optimal temperature for your favorite foods

Second icemaker option – Always have extra ice on hand with an optional second icemaker in the freezer (IM5D kit sold separately)

TwinChill™ evaporators – Separate climates in the fresh food and freezer sections help keep foods fresh

Showcase LED lighting – Positioned throughout the interior and under fresh food doors to spotlight foods inside the refrigerator and in the freezer

Quick Space shelf – Quickly slides out of the way to make room for tall items

Drop-down tray – Allows for extra door storage when you need it and tucks away when you don't

Turbo Cool setting – Drops interior temperature to maintain freshness after frequent openings


Model PYE22KBLTS – Black Stainless

Model PYE22KELDS – Black Slate

Model PYE22KMKES – Slate

Model PYE22KSKSS – Stainless steel

Model PYE22KYNFS – Fingerprint resistant stainless

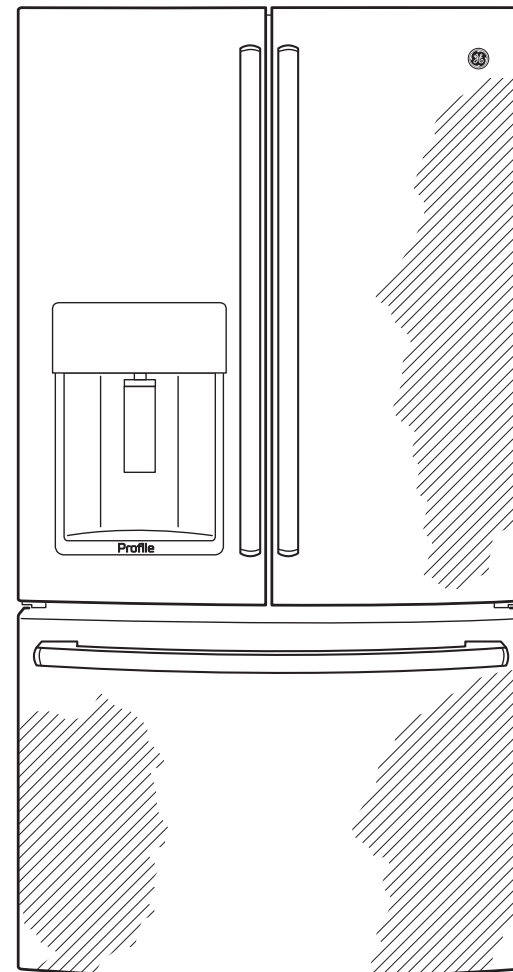

As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

PTS7000BN/FN/SN

GE Profile™ Series 30" Built-In Single Electric Convection Wall Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

NOTE: Single wall ovens are NOT approved for stacking above or below another single wall oven.


NOTE: Wall coverings, countertops and cabinets surrounding the wall oven must be able to withstand a temperature of up to 200°F (94°C).

NOTE: If the cabinet in which the wall oven is installed does not have a solid bottom, two braces or runners must be installed to support the weight of the oven. The runners and braces must support up to 220 lbs (99 kg).

NOTE: Door handle protrudes 3" from door face. Cabinets and drawers on adjacent 45° and 90° walls should be placed to avoid interference with the handle.


ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with product for current dimensional data.

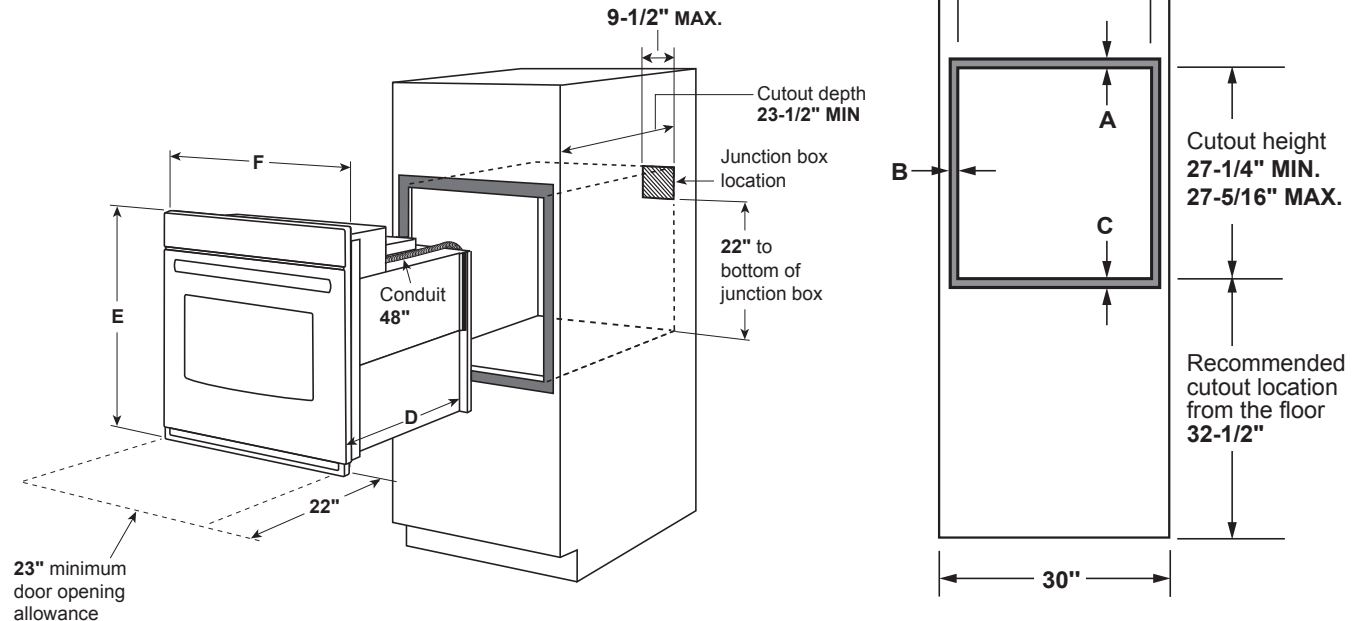

Dimension and installation information are shown in inches.

KW RATING	
240V	3.6
208V	2.7
BREAKER SIZE	
240V	20 Amps
208V	20 Amps

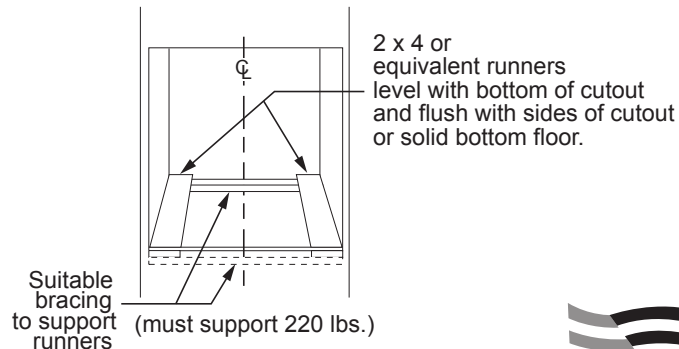

PTS7000	
Cabinet	30"
A - Overlap of oven at top of cutout	1"
B - Overlap of oven other side of edge of cutout	3/4"
C - Overlap of oven at bottom of cutout	1-1/4"
Oven	
D - Install depth	23-1/2"
E - Overall height with trim	28-5/8"
F - Overall width	29-3/4"



For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



Specification Revised 7/19

PTS7000BN/FN/SN

GE Profile™ Series 30" Built-In Single Electric Convection Wall Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)


NOTE: 30" Single electric wall ovens are approved for installation below a countertop, and below certain gas and electric cooktops. Refer to the Approved Combinations Matrix available at geappliances.com for specific information.

NOTE: 30" Single electric wall ovens are approved for installation above 27" and 30" warming drawers.


ATTENTION INSTALLER: Electric wall ovens are NOT approved for installation with a plug and receptacle. They must be hard wired into an approved junction box.

IMPORTANT: Before installing, consult installation instructions packed with ALL products for current dimensional and combination data.

UNDERCOUNTER INSTALLATION

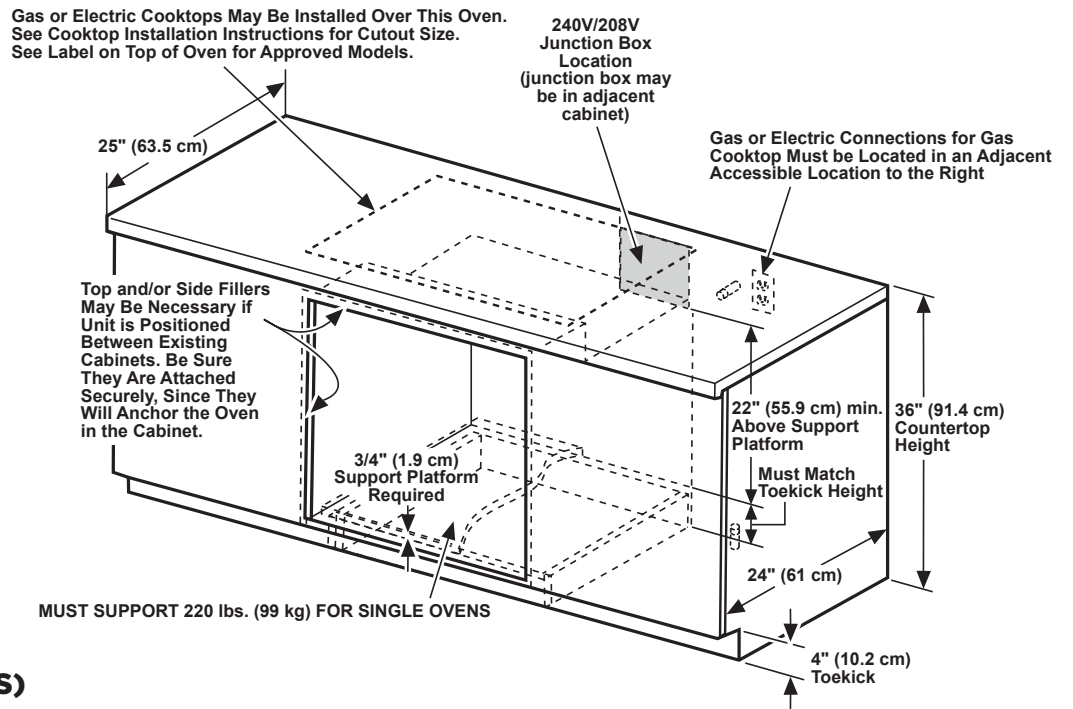


SIDE-BY-SIDE INSTALLATION (TWO OVENS IN SEPARATE CUTOUTS)

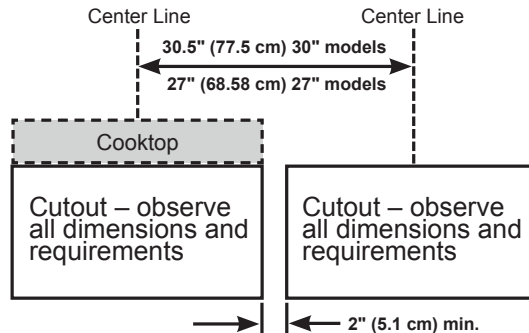

NOTE: One cooktop may be centered over either oven in the side-by-side installation.

INSTALLATION BELOW A COOKTOP

IMPORTANT: Maintain a minimum distance of **31 1/4"** from the top surface of the countertop to the wall oven platform to ensure that the cooktop and wall oven do not interfere with each other (see picture).

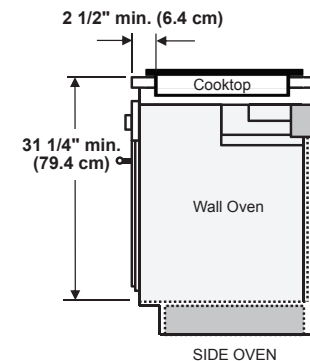

For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.

Specification Revised 7/19

PTS7000BN/FN/SN

GE Profile™ Series 30" Built-In Single Electric Convection Wall Oven

FEATURES AND BENEFITS

Precision cooking modes – Skip the oven hover, even when cooking the most intricate dishes, thanks to advanced technology that provides step-by-step instructions and automatic adjustments to oven temperatures and cook times for perfect results

Brilliant Touch 7" Display – A bright, interactive touch screen makes it fun and easy to program the oven

True European Convection with Direct Air – Optimize your results on roasts, chicken, turkey and other special-occasion favorites, with the only cooking system that delivers true top-down convection

No preheat options – Save time with a variety of precision cooking modes that eliminate the need for preheating

Hot air frying – Achieve crispy, never greasy, fried food results in your oven without the oil

Anywhere control with remote notifications – Save time by conveniently preheating and monitoring your oven from anywhere using the GE Appliances Kitchen app

Never scrub, heavy-duty smooth glide racks – Easily remove even the heaviest dishes with a roller rack that's engineered to glide seamlessly out of the oven

Scan-to-cook technology – Prepare your favorite packaged foods to perfection simply by scanning the barcode on the package with your smartphone and letting your oven adjust settings automatically

Self-clean oven with optional Steam Clean – Let your oven do the cleaning for you with two ways to eliminate baked on messes

Model PTS7000BNTS – Black Stainless

Model PTS7000FNDS – Black Slate

Model PTS7000SNSS – Stainless Steel



FIT GUARANTEE

Replacing a similar wall oven from GE Appliances or another brand? GE wall ovens are guaranteed for an exact fit or GE Appliances will pay up to \$300 toward modifications.

Visit geappliances.com for more info



PP9036SJ


GE Profile™ Series 36" Built-In Touch Control Cooktop

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

IMPORTANT: Requires a 5" free area between the bottom of the cooktop to any combustible material, i.e., shelving. Free area not required when installing wall oven underneath cooktop. Refer to installation instructions. Requires a 15" minimum from cooktop to adjacent overhead cabinets. Units are furnished with a 48" flexible armored cable.


NOTE: 36" Ribbon cooktops are approved for use over select GE 30" Single Wall Ovens and Warming Drawers. Refer to cooktop and wall oven/warming drawer installation instructions packed with product for current dimensional data. If installed with a GE Telescopic Downdraft System, consult both the cooktop and downdraft installation instructions packed with product before installing. Cooktop gas/electric supply may need to be re-routed to install downdraft. The countertop cutout requires 23-1/2" minimum flat countertop surface and 25" minimum total countertop depth. In addition, other clearances to front edge of the countertop must be considered. Before installing, consult installation instructions packed with product for current dimensional data.

APPROXIMATE COOKING DIMENSIONS

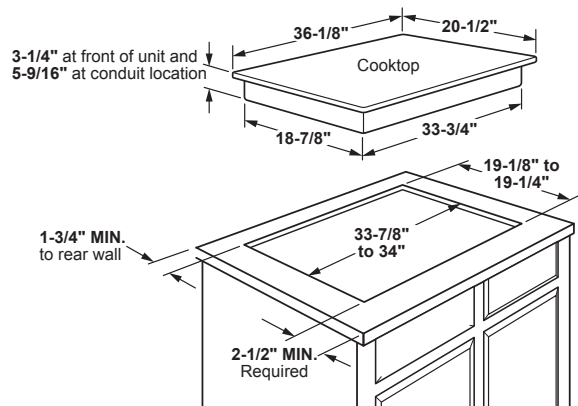


To insure accuracy, it is best to make a template when cutting the opening in the counter

13" MAX. depth of unprotected overhead cabinets (when no hood or microwave is installed)

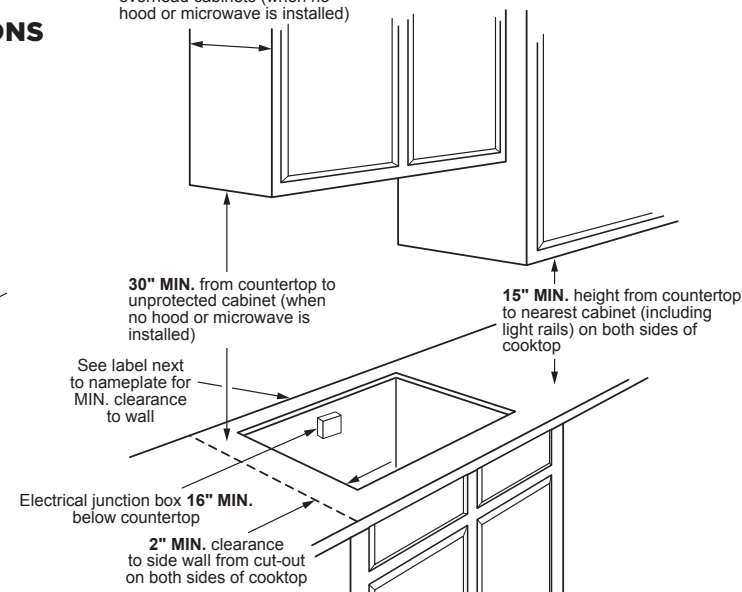

INSTALLATION ABOVE A WALL OVEN

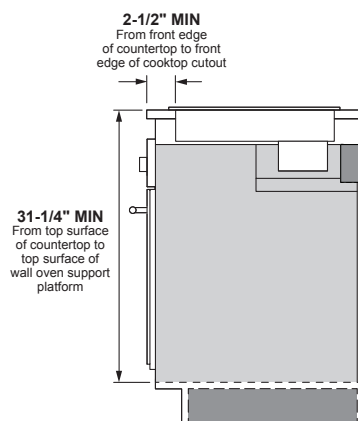

VOLTAGE (60HZ AC)	240V	208V
CONNECTED LOAD (MAX.)	9.6kW	7.2kW
CURRENT DRAW (MAX.)	40.0 Amps	34.7 Amps
RECOMMENDED CIRCUIT BREAKER†	40 Amps	40 Amps

†**NOTE:** Check local codes for required breaker size.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 1/19

PP9036SJ

GE Profile™ Series 36" Built-In Touch Control Cooktop

FEATURES AND BENEFITS

Five radiant cooking elements – Cook foods quickly and evenly on this sleek, glass surface

Glide touch controls – Precisely control heat instantly and easily with one swipe

6"/9"/12" tri-ring element – Use different pan sizes on this single, 3,000-watt flexible element

5"/8" Power Boil element – Use different pan sizes on this single, 2,400-watt flexible element that produces rapid powerful heat

SyncBurners – Control two 7" elements simultaneously to evenly heat large cookware or griddles*

Multi-element timer – Manage up to five pans at once with individual timers for each element

Control lock capability – Protects against unintended activation

Custom Settings – Personalize your cooktop settings to fit your cooking style

Red LED display with black glass surface and stainless steel trim – Achieve a modern look that complements the entire kitchen and other stainless steel appliances


Hot surface indicator lights – Know when elements are too hot to touch with a quick glance

Model PP9036SJSS – Stainless steel

GUARANTEED FIT

Replacing a similar cooktop from GE Appliances or another brand? GE cooktops are guaranteed for an exact fit or GE Appliances will pay up to \$100 toward modifications

Visit geappliances.com for more info

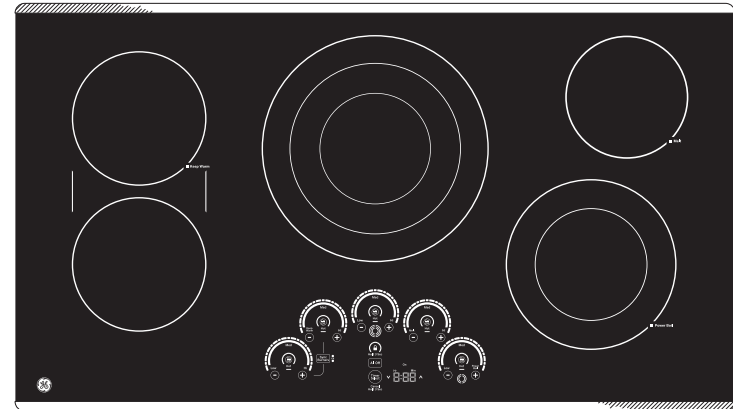

***OPTIONAL STAINLESS STEEL CLAD ALUMINUM GRIDDLE**

Achieve even results with this lightweight griddle, tailored to fit GE SyncBurners. Order part number JXGRIDL1 from your GE Dealer



JVW5361SJ/EJ/BJ/FJ

GE® 36" Wall-Mount Pyramid Chimney Hood

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

INSTALLATION INFORMATION:

Before installing, consult Use & Care/installation instructions packed with product for current dimensional data.

OPTIONAL ACCESSORIES

UXDC72SJSS/FJDS/BJTS – 9(ft.) Ceiling Duct Cover Kit

UXDC53SJSS/EJES/BJTS/FJDS – 10(ft.) Ceiling Duct Cover Kit

For 30" distance from counter to hood:

Below 8'-4" ceiling height – no duct cover required

8'-4" – 9'-6" ceiling height – use UXDC72SJSS/FJDS/BJTS

Above 9'-7" ceiling height – use UXDC53SJSS/EJES/BJTS/FJDS



Refer to Installation Instructions for exact specifications

UXRC70 – Remote Control

JXCF72 – Charcoal Filter

(needed if used in recirculation mode)

AMP RATING	
120V	2.5

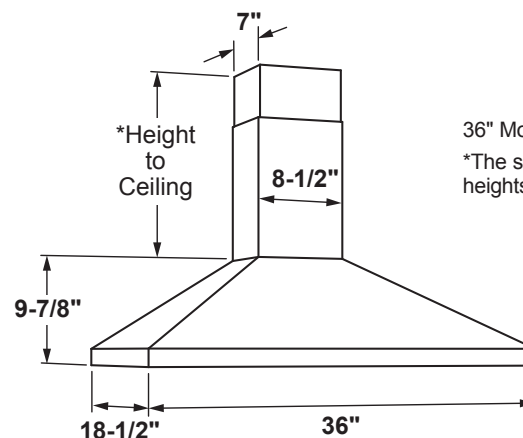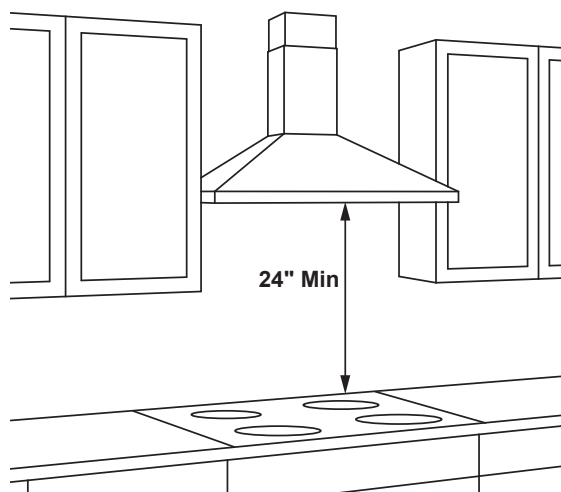

36" Models Require a 36"-Wide Opening

*The supplied duct cover fits 7'-4" to 9'-0" ceiling heights (10' with optional high ceiling kit UXDC53)

The vent hood must be installed 24" min. above the cooking surface. For optimal performance, installing the hood more than 38" above the cooking surface is not recommended. The hood installation height above the cooking surface depends upon ceiling height. The telescopic duct cover conceals the ductwork running from the top of the hood to the ceiling.

NOTE: Installation height should be measured from the cooking surface to the lowest part of the hood. This hood may be installed onto a wall and vented to the outdoors, or it can be installed for recirculating operation. Parts for recirculating operation are supplied with the hood. However, when installed for recirculating operation, the optional charcoal Filter JXCF72 will need to be purchased separately.



For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 01/20

JVW5361SJ/EJ/BJ/FJ

GE® 36" Wall-Mount Pyramid Chimney Hood

FEATURES AND BENEFITS

350-CFM venting system with boost – Effectively remove smoke, grease, odor and moisture

Electronic backlit controls – Add a sophisticated look with this up-front, easy-to-use display

Dual halogen cooktop light – Enjoy better visibility with a brightly lit cooktop and surrounding surface

Night light – Keep a dim light on for visibility at all hours

Convertible venting options – Select recirculating or external venting


Remote control option – Control your ventilation lighting and fan speed from anywhere in the kitchen

Model JVW5361SJSS – Stainless steel

Model JVW5361EJES – Slate

Model JVW5361BJTS – Black stainless

Model JVW5361FJDS – Black slate

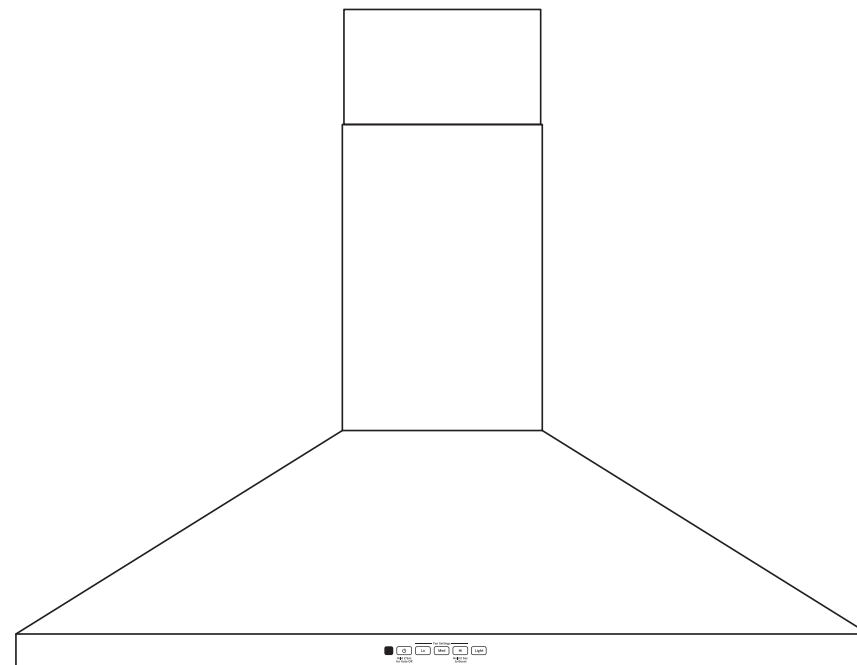

PWB7030SL/EL


GE Profile™ Series Built-In Microwave/Convection Oven

DIMENSIONS AND CABINET INSTALLATION INFORMATION (IN INCHES)


NOTE: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least a 194°F temperature rating.

INSTALLATION INFORMATION:


Before installing, consult installation instructions packed with product for current dimensional data.

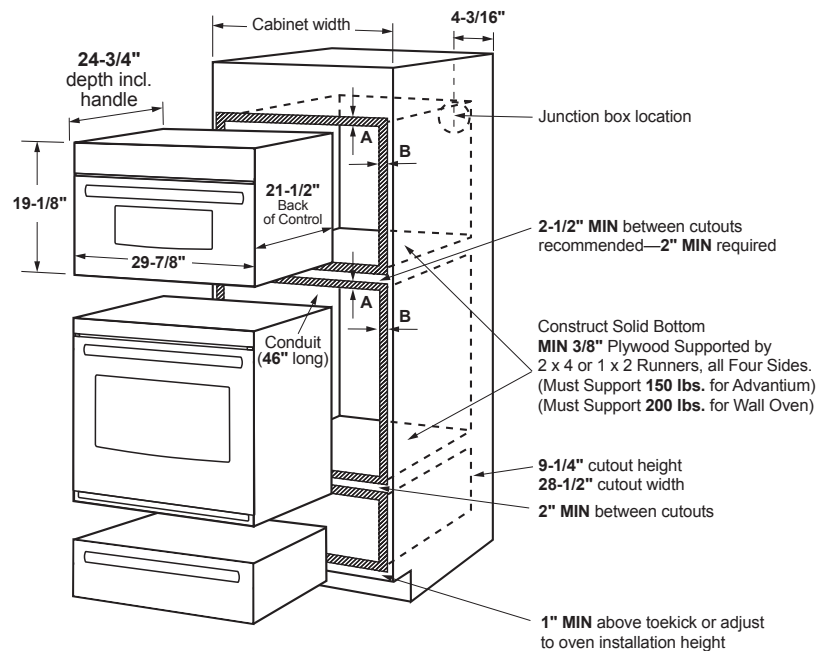

Note: Cabinets installed adjacent to wall ovens must have an adhesion spec of at least 194° F temperature rating.

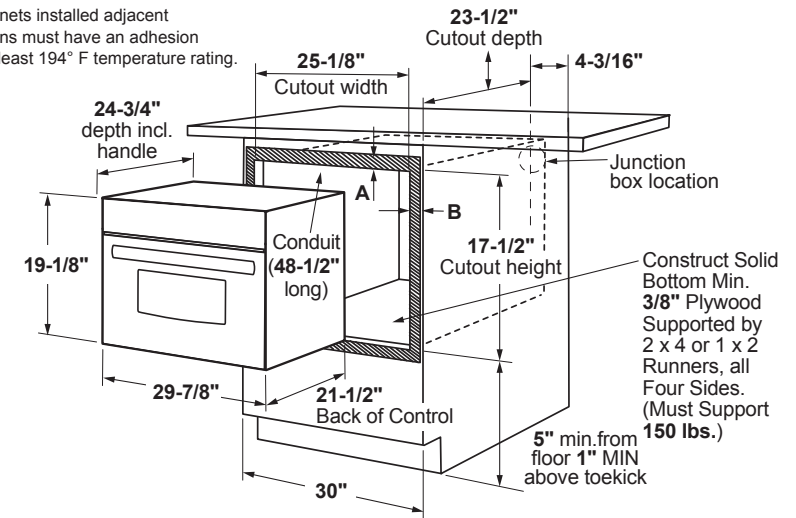

A= Allow 1" overlap of oven over bottom edge of cutout, and allow 1-1/4" overlap at top edge of cutout.
B= Allow 11/16"- 3/4" for overlap of oven over side edges of cutout.

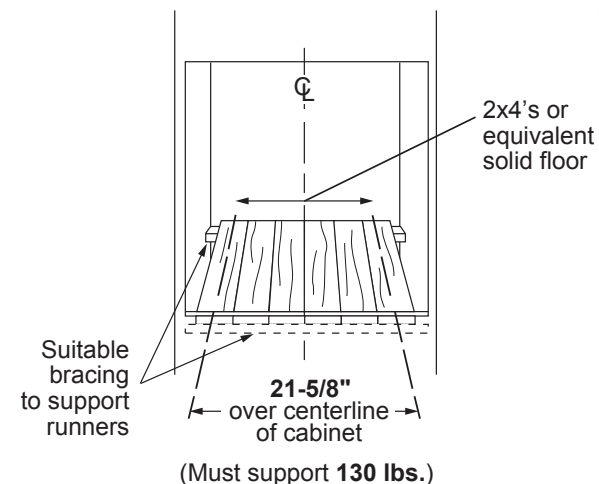

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 3/17

PWB7030SL/EL

GE Profile™ Series Built-In Microwave/Convection Oven

FEATURES AND BENEFITS

1.7 cu. ft. capacity - 975 microwave watts (IEC test procedure) and 1500 convection watts

Convection cooking - Choose this setting when baking or browning is desired

Combination Fast Cook setting - Combining microwave and radiant heat for speed

Steam cook button - Perfectly prepare your steamed favorites

Glass touch controls - Glass touch controls offer a sleek console that is both easy to use and clean

My Cycle - Create a custom cook time setting, and with one touch, cook your favorite dish just the way you like


Warming and Proofing oven - Keep foods hot and ready to serve in the warming oven or use the proofing oven to provide the ideal environment for bread to rise

120 Volts - Plugs into any wall outlet

Convection rack - Achieve golden-brown results

Model PWB7030SLSS - Stainless steel

Model PWB7030ELES - Slate


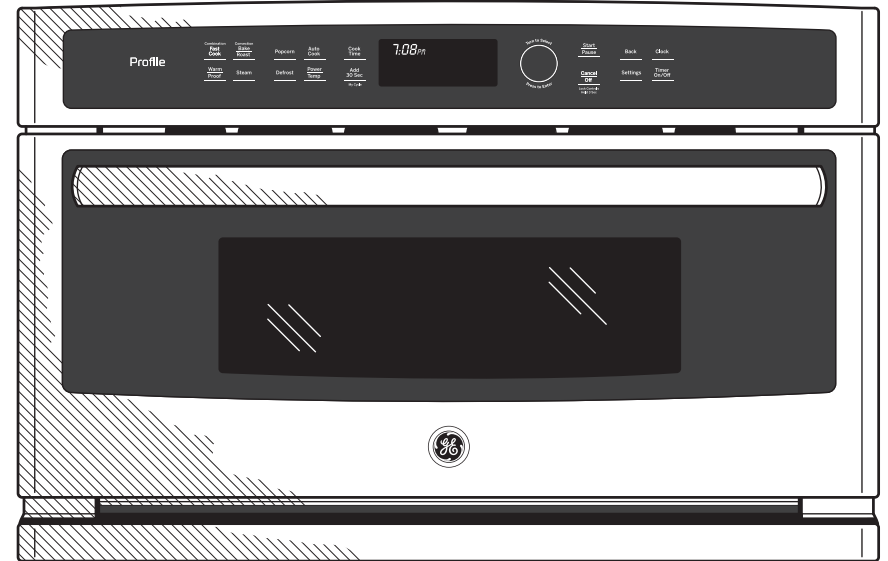


PEB9159SJSS

GE Profile™ Series 1.5 Cu. Ft. Countertop Convection/Microwave Oven

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

EXTERIOR DIMENSIONS (IN INCHES)	
Height	13"
Width	21-3/4"
Depth	16"
Depth including bumpout	20"
Depth from back of case to front legs	13"

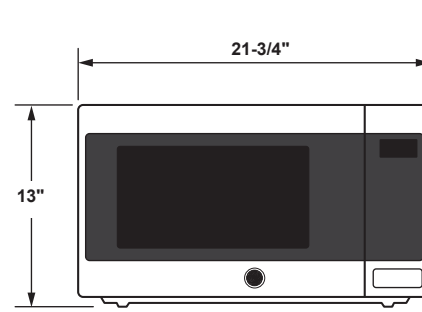

OPTIONAL ACCESSORY TRIM KITS FOR GE MICROWAVE OVENS (AVAILABLE AT ADDITIONAL COST)


For a custom built-in appearance, these kits allow built-in installation of the countertop microwave oven into a wall or cabinet alone and are U.L. approved for installation over a GE single electric wall oven. These kits should not be installed over a gas wall oven.

ACCESSORY TRIM KITS	"Z"	MAX HEIGHT	TRIM KITS
30" Deluxe	29-3/4"	19-1/8"	JX9153SJ
27" Deluxe	26-7/8"	19-1/8"	JX9152SJ

NOTE: 120V, 60-cycle, grounded power receptacle location optional on back within cabinet opening.

INSTALLATION INFORMATION: This information is not intended to be used for installing unit described. Before installing, consult installation instructions packed with product/kit for current dimensional data.

*Height of product when installed with kit rail and bottom duct: 14-1/2"

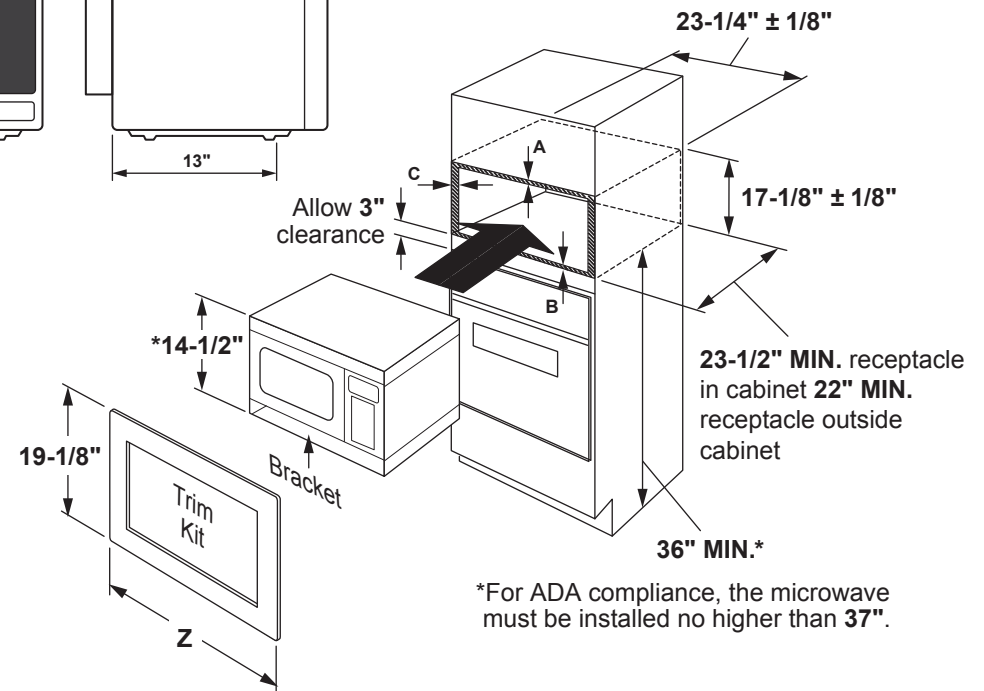

*For ADA compliance, the microwave must be installed no higher than 37".

CABINET OVERLAP REQUIREMENTS	30"	27"
A - Overlap of trim kit over top of cabinet	1"	1"
B - Overlap of trim kit over bottom of cabinet	1"	1"
C - Overlap of trim kit over sides of cabinet	3-5/16"	1-7/8"

NOTE: Allow an additional inch of clearance beyond trim kit frame on all sides.



For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Specification Revised 8/16

PEB9159SJSS

GE Profile™ Series 1.5 Cu. Ft. Countertop Convection/Microwave Oven

FEATURES AND BENEFITS

1.5 cu. ft. capacity – 1,000 Watts (IEC-705 test procedure)

Convection cooking – Choose this setting when baking or browning is desired

Sensor cooking controls – Automatically adjust time and power for delicious cooking results

Warming oven – Keeps food hot and ready to serve

Optional built-in trim kit – Achieve a custom appearance and built-in convenience with a sleek, matching trim kit

Convection rack – Achieve golden-brown results with a specially designed rack that allows air to circulate around foods for even heat distribution during convection cooking

Recessed turntable – Maximizes oven space and flush design easily accommodates multiple dishes

Model PEB9159SJSS – Stainless steel



PDT775SBN/SYN

GE Profile™ Series Stainless Steel Interior Dishwasher with Hidden Controls



DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)

ELECTRICAL RATING

Voltage AC.....	120
Hertz.....	60
Total connected load amperage.....	10.2
Calrod® heater watts max.....	400/1200

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

INSTALLATION INFORMATION: Before installing, consult installation instructions packed with product for current dimensional data.

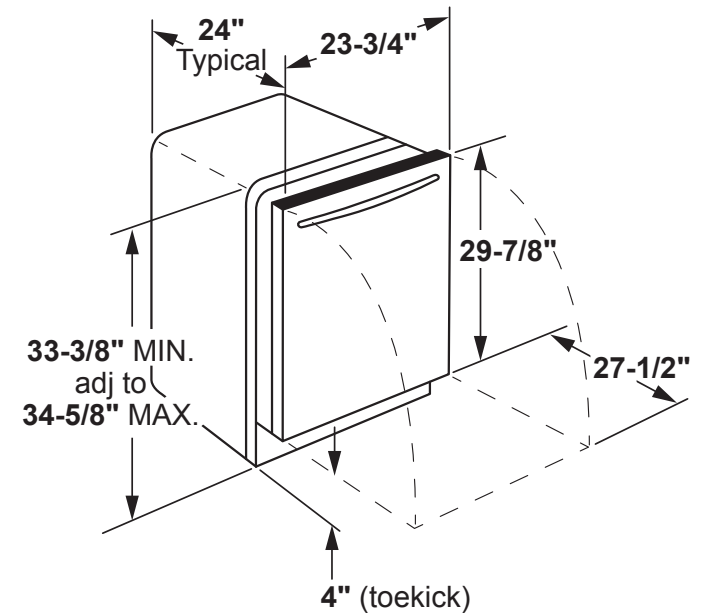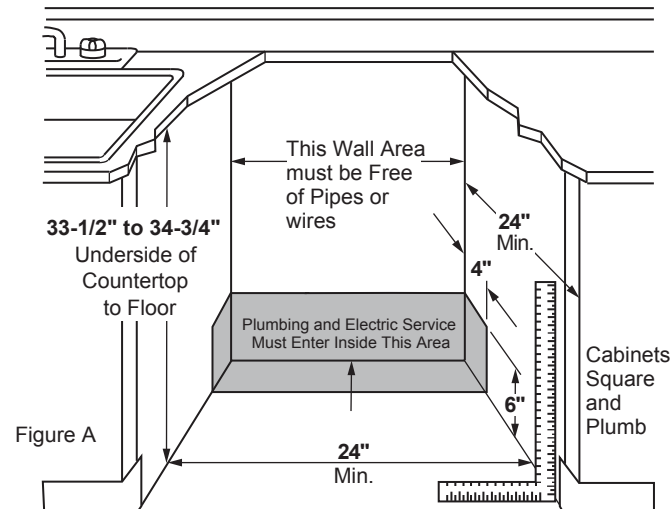

For answers to your GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

Specification Revision 9/19

PDT775SBN/SYN

GE Profile™ Series Stainless Steel Interior Dishwasher with Hidden Controls

FEATURES AND BENEFITS

Twin Turbo Dry Boost – Ensure a complete dry with every cycle, thanks to a dual fan system and inline heater that provide exceptional performance, even with plastics

WiFi Connect – Monitor cycle status, check rinse aid levels and automatically reorder detergent using your mobile device

Deep Clean Silverware Jets – No matter how you load your silverware basket, powerful jets blast away stuck-on food for silverware that's always spotless

Leak Defense with Active Flood Protect – Uncommon leaks can be easily detected and contained

Bottle Jets – Clean hard-to-reach areas inside tall items with up to 4 dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean

Piranha Hard Food Disposer – To ensure consistently clean items, this stainless steel blade rotates at 3,600 RPM to pulverize food particles and helps to prevent large particles from clogging the wash arms

1 Hour Wash – Enjoy a quality clean when you're short on time


Steam + Sani – Loosens tough soils before any cycle virtually eliminating the need for soaking or pre-rinsing dishes. Plus a High-temperature rinse sanitizes and reduces 99.999% of bacteria found on dishes

16 place settings – Extra capacity to ensure easy cleanup from your largest gatherings

42 dBA – Ultra-quiet operation creates a peaceful kitchen environment even as it delivers powerful wash performance

Model PDT775SYNFS – Fingerprint Resistant Stainless

Model PDT775SBNTS – Black Stainless

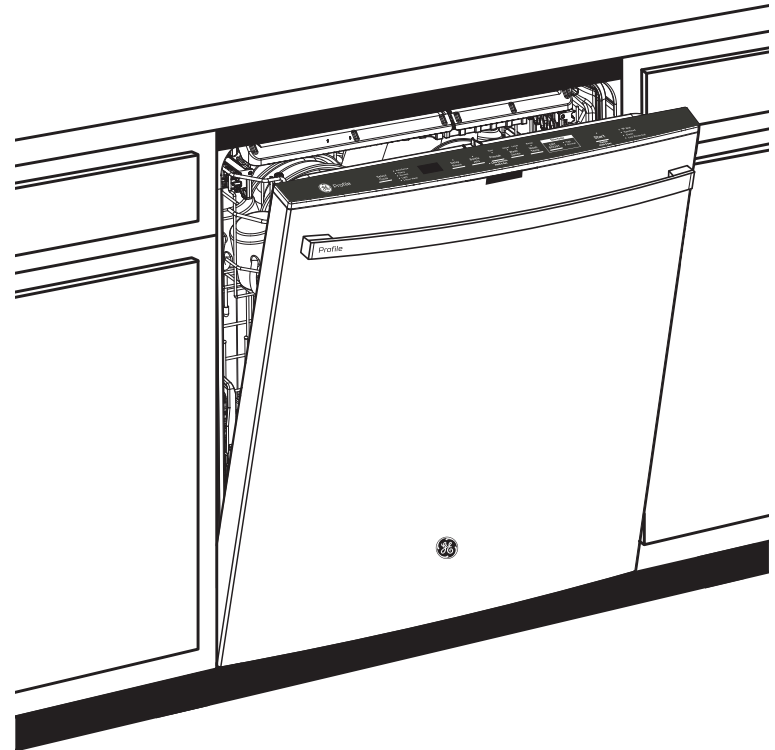

GDT226SSL

GE® Stainless Steel Interior Dishwasher with Hidden Controls

DIMENSIONS AND INSTALLATION INFORMATION (IN INCHES)



ELECTRICAL RATING

Voltage AC.....120

Hertz.....60

Total connected load amperage.....8.9

For use on adequately wired 120-volt, 15-amp circuit having 2-wire service with a separate ground wire. This appliance must be grounded for safe operation.

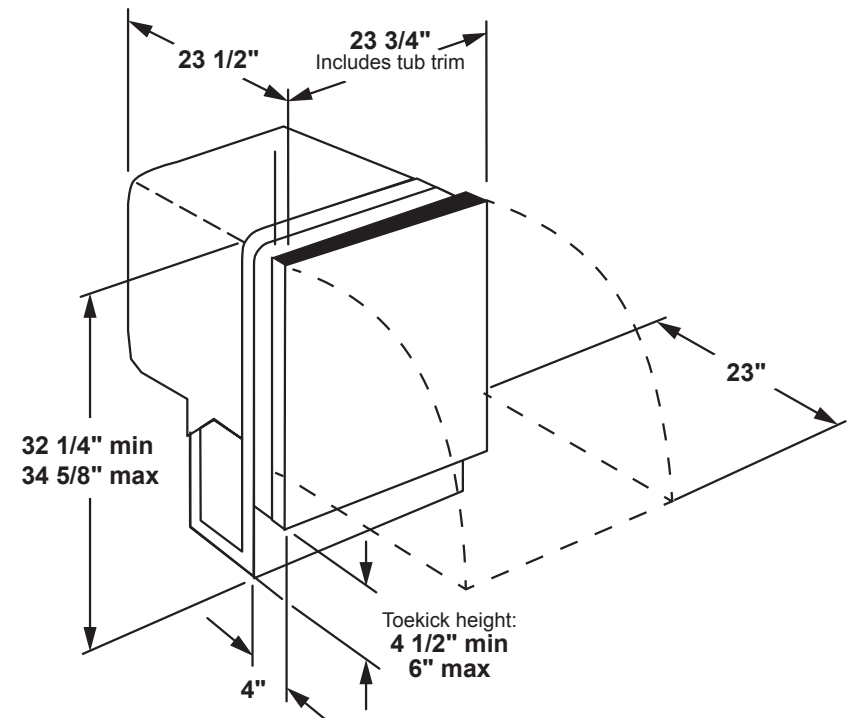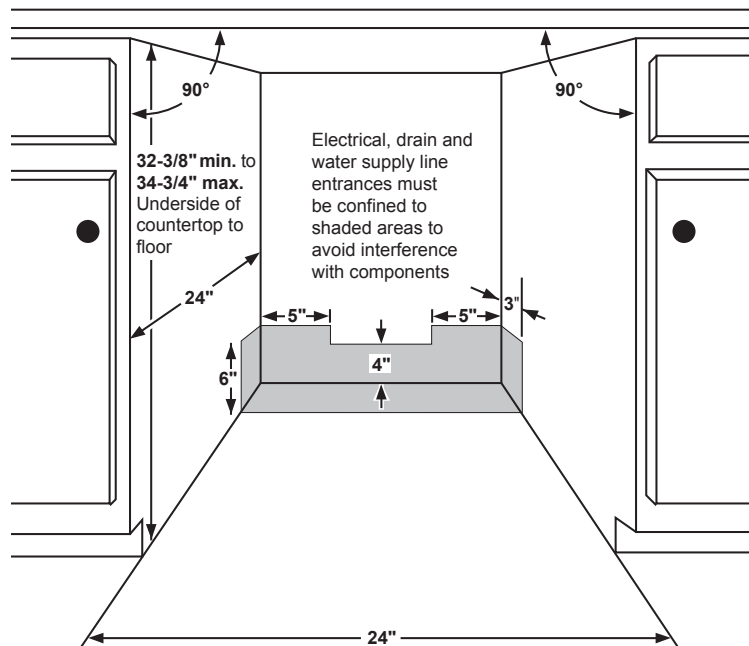

For answers to your Monogram, GE Café™ Series, GE Profile™ Series or GE Appliances product questions, visit our website at geappliances.com or call GE Answer Center® Service, 800.626.2000.



Listed by
Underwriters
Laboratories



As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.

GDT226SSL

GE® Stainless Steel Interior Dishwasher with Hidden Controls

FEATURES AND BENEFITS

ADA Compliant with Low-Profile Installation – Great for 34" counter top heights and raised subfloors

3-Level Wash – Expect exceptionally clean table-ready dishes with powerful wash arms


Autosense Cycle – A beam of light measures soil levels and water temperature to adjust to the ideal cycle time

Piranha™ hard food disposer with removable filter – To ensure consistently clean items, this stainless steel blade rotates at 3,600 RPM to pulverize food particles and helps to prevent large particles from clogging the wash arms

Sanitize option (NSF Certified) – High-temperature rinse sanitizes and reduces by 99.999% the bacteria found on dishes

dBA 51

Model GDT226SSLSS – Stainless steel

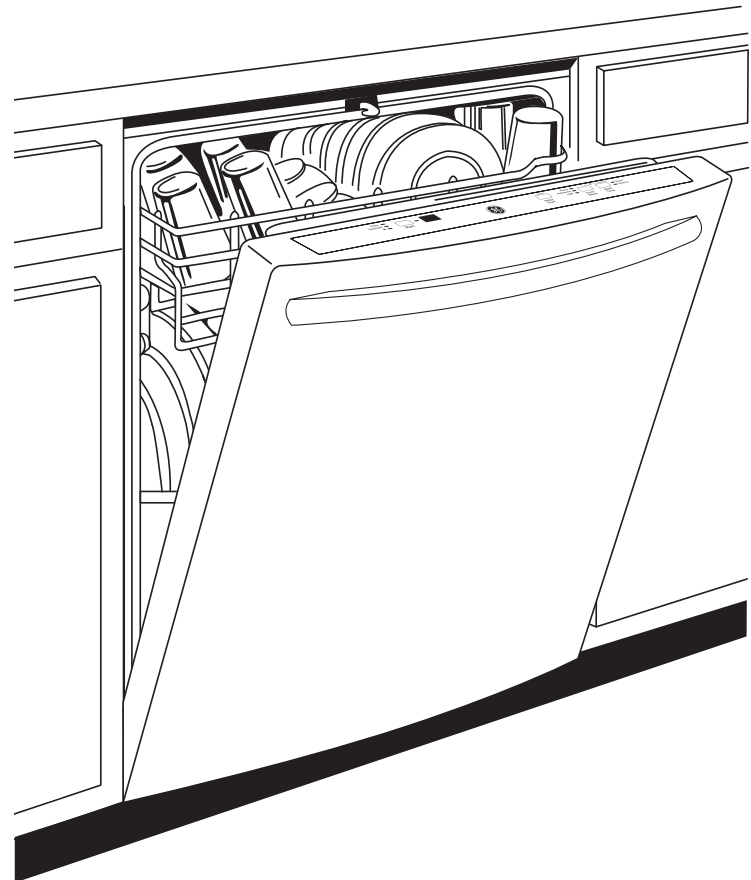

As an ENERGY STAR® partner, GE has determined that this product meets the ENERGY STAR guidelines for energy efficiency.



GE APPLIANCES
a Haier company

Upgrade Package



Model#: ZWE23ESNSS

Monogram ENERGY STAR® 23.1 Cu. Ft. Counter-Depth French-Door Refrigerator



Approx Dimensions (HxDxW):
70 1/2 in X 31 1/2 in X 36 in

- TwinChill™ evaporators - Separate climates in the fresh food and freezer sections help keep foods fresh
- Showcase LED lighting - Positioned throughout the interior and under fresh food doors to spotlight foods inside the refrigerator and in the freezer
- Full-width electronic temperature-controlled drawer with LED lights - 3 accurate settings deliver the optimal temperature for your favorite foods, while lights indicate the chosen setting
- Drop-down tray - Allows for extra door storage when you need it and tucks away when you don't




Model#: ZTS90DPSNSS

Monogram 30" Smart Electric Convection Single Wall Oven Statement Collection



Approx Dimensions (HxDxW):
28 11/16 in X 27 5/16 in X 29 3/4 in

- The Monogram Statement Collection - Edge-to-edge handles, polished stainless steel, and hand-finished edges convey a sense of solidity and beauty
- LCD controls - Allow you to adjust oven settings with little effort
- WiFi Connect - Perfectly in sync with a busy lifestyle, Alexa or Google Home can be used to control an array of oven functions from both inside and outside the home



Model#: ZHU36RDJBB

Monogram 36" Induction Cooktop

Approx Dimensions (HxDxW):
4 5/8 in X 20 3/8 in X 36 in

- Five induction cooking elements - Enjoy a new level of rapid, precise heating with a cool-to-the-touch surface that's easy to clean
- Glide touch controls - Easy to use electronic controls allow you to precisely raise or lower heat in an instant with one easy swipe
- 11" 3700W induction element - Rapidly boil water with our most powerful induction element
- SyncBurners - Control two 7" elements simultaneously to evenly heat large cookware or the included griddle



Model#: ZEU36RSJSS

Monogram 36" Touch Control Electric Cooktop

Approx Dimensions (HxDxW):
6 1/4 in X 20 7/8 in X 36 1/8 in

- Glide touch controls - Precisely control heat instantly and easily with one swipe
- Five radiant cooking elements - Cook foods quickly and evenly on this sleek, glass surface
- 12"/9"/6" 3,600W Power Boil element - Flexible triple element allows you to use different pan sizes on a single location that produces rapid powerful heat
- 9"/7"/5" 3,000W Power Boil element - Flexible triple element allows you to use different pan sizes on a single location that produces rapid powerful heat



Model#: ZSB9132NSS

Monogram Smart Built-In Oven with Advantium® Speedcook Technology- 120V



Approx Dimensions (HxDxW):
20 1/4 in X 21 1/2 in X 29 3/4 in

- The Monogram Statement Collection - Edge-to-edge handles, polished stainless steel, and hand-finished edges convey a sense of solidity and beauty
- Five-in-one-oven - Experience exceptional flexibility and cooking results with the innovative five-in-one oven. Advantium® technology enhanced, it can be used as a convection oven, toaster oven, warming/proofing oven, precision cook oven and microwave



GE APPLIANCES
a Haier company




Model#: ZV36TSFSS

Monogram 36" Stainless Steel Professional Hood

Approx Dimensions (HxDxW):
18 in X 25 in X 36 in

- 620 CFM vertical exhaust -
- 2 halogen lamps with 4 lighting levels -
- Infrared warming lamp(s) -
- Utensil racks -



Model#: ZDT985SPNSS

Monogram Smart Fully Integrated Dishwasher

Approx Dimensions (HxDxW):
34 in X 24 in X 23 3/4 in

- The Monogram Statement Collection
 - Polished stainless steel, and hand-finished edges convey a sense of solidity and beauty
- Advanced wash system - Designed to achieve the ultimate clean, this advanced wash system with over 90 powerful jets delivers complete washing coverage to every corner of the dishwasher
- Full-extension, adjustable third rack with premium slides - Convenient and adjustable, this expansive third rack easily accommodates an entire flatware collection, plus carving knives, soup ladles and other cooking/serving tools for the ultimate clean

36" FREE-STANDING FRENCH-DOOR REFRIGERATOR

ZWE23ESNSS



THE MONOGRAM MINIMALIST COLLECTION

A streamlined design and precisely machined metals create a contemporary yet functional aesthetic

TWINCHILL™ EVAPORATORS

Separate climates in the fresh food and freezer sections help keep foods fresh

SHOWCASE LED LIGHTING

Positioned throughout the interior and under fresh food doors to spotlight foods inside the refrigerator and in the freezer

FULL-WIDTH ELECTRONIC TEMPERATURE-CONTROLLED DRAWER WITH LED LIGHTS

3 accurate settings deliver the optimal temperature for your favorite foods, while lights indicate the chosen setting

DROP-DOWN TRAY

Allows for extra door storage when you need it and tucks away when you don't

QUICK SPACE SHELF

Functions as a normal full-sized shelf when needed and easily slides down for instant storage flexibility

ADVANCED WATER FILTRATION USES RPWF REPLACEMENT FILTER

Reduces trace pharmaceuticals from water and ice*

* Removes 98% of ibuprofen, atenolol, fluoxetine, progesterone and trimethoprim. These pharmaceuticals are not necessarily in all users' water





SPECIFICATIONS

Overall Width	36" (91.4 cm)
Overall Height	70 1/2" (179.1 cm)
Overall Depth	30 13/16" (78.2 cm)
Drawer Clearance	21 1/2" (54.6 cm)
Cutout Width	36 1/4" (92.1 cm)
Cutout Height	71" (180.3 cm)
Cutout Depth	26 3/8" (67 cm)
Plumbing Requirements	1/4" OD copper tubing or GE SmartConnect kit
Shipping Weight	400 lb (181.4 kg)

ATTENTION ELECTRICIAN:

A 115 volt 60Hz., 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical receptacle recessed into the back wall.


OVERALL DIMENSIONS

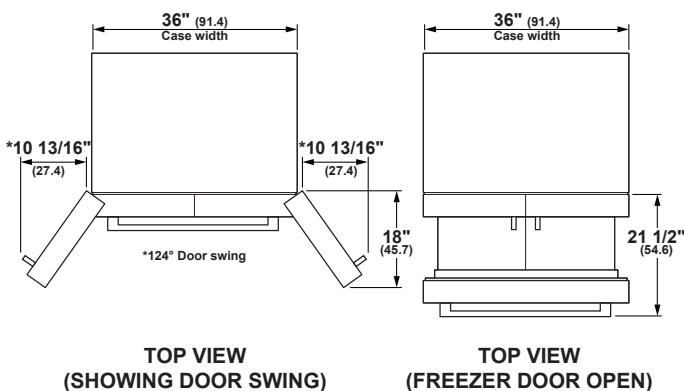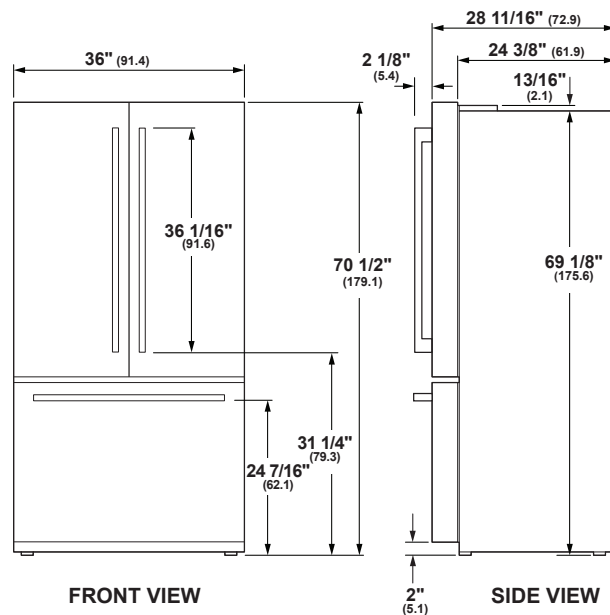

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

ANTI-TIP BRACKET INSTALLATION

A Attachment to Wall and Floor

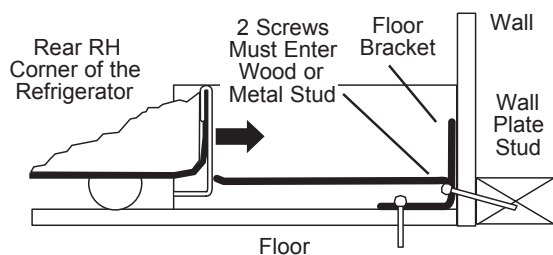

AIR GAP INSTALLATION DIMENSIONS

Each Side 1/8" (.3 cm)

Top 1" (2.5 cm)

Back 2" (5.1 cm)

HELPFUL TIPS

A The refrigerator is top heavy and must be secured to prevent the possibility of tilting forward.

! WARNING:

Wood Wall and Floor Construction:

- Drill the appropriate number of 1/8" (3 mm) pilot holes in the center of each floor bracket hole being used (a nail or awl may be used if a drill is not available) AND remove the locator template from the floor.
- Mount the anti-tip floor bracket by fastening the 2, or recommended 4, #10-16 hex-head screws tightly into place as illustrated in figure 3.

MONOGRAM 30" BUILT-IN SINGLE OVEN

ZTS90DPSNSS



THE MONOGRAM STATEMENT COLLECTION

Edge-to-edge handles, polished stainless steel, and hand-finished edges convey a sense of solidity and beauty

LCD CONTROLS

Allow you to adjust oven settings with little effort

WIFI CONNECT

Perfectly in sync with a busy lifestyle, Alexa or Google Home can be used to control an array of oven functions from both inside and outside the home

PRECISION COOKING MODES

Master new recipes and perfectly execute favorite dishes using this ultra-smart system that automatically tracks cooking progress, modifies temperatures and adjusts cook times

SCAN-TO-COOK

Innovative and time saving, scan-to-cook technology ensures that packaged foods are always prepared correctly. A simple scan of the barcode with a smartphone delivers consistently, delicious results

TRUE EUROPEAN CONVECTION WITH DIRECT AIR

Channels heated air from the top of the oven and circulates it around food on all sides for perfectly uniform baking and roasting

5.0 CUBIC FOOT CAPACITY

Easily accommodates even the largest meals

EXCLUSIVE SELF-CLEAN, (1 FULL-EXTENSION, 2 REGULAR) OVEN RACKS

Glide in and out smoothly on stainless steel ball bearings, and are designed to be left in the oven during the self-clean cycle

TEN-PASS BAKE ELEMENT

Covers more surface area for more even baking results

EIGHT-PASS BROIL ELEMENT

Provides complete coverage and even browning, even for large dishes

SELF-CLEAN WITH STEAM CLEAN OPTION

Gives you flexible options for thorough oven cleaning



Overall Width	29 3/4" (75.6 cm)
Overall Height	28 11/16" (728 cm)
Overall Depth Including Handle	27 5/16" (70.6 cm)
Oven Door Clearance	20 9/16" (52.2 cm)
Overall Oven Interior Capacity	5.0 cu. ft. (141.6 liters)
Oven Interior Dimensions (W x H x D)	25" x 17 3/8" x 20 1/4" (63.5 x 44.1 x 51.4 cm)
Minimum Cabinet Width*	30" (76.2 cm)
Minimum Cabinet Depth*	24" (61.0 cm)
Minimum Base Support	220 lbs. (99 kg)
Cutout Width*	28 1/2" (72.4 cm) Min 28 5/8" (72.7 cm) Max
Cutout Height*	27 1/4" (69.2 cm) Min 27 5/16" (69.4 cm) Max
Cutout Depth*	23 1/2" (59.7 cm) Min
Volts/Hertz/Amps	240/208 V AC, 60 Hz, 20A
Conduit Length	48" (72" available special order: WB18T10398)
Electrical Rating	3.4 kW at 208V 4.5 kW at 240V
Shipping Weight	184 lbs. (84 kg)

A 240/208V, 60Hz, 20 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.

Technical drawing of the 24-inch wide oven showing front and side views with dimensions.

Front View Dimensions:

- Top width: 29 3/4" (75.6)
- Min cutout width: 28 1/2" (72.4)
- Top panel height: 1" (2.5)
- Right side panel height: 5 1/4" (13.3)
- Interior width: 25 3/4" (65.4)
- Interior height: 15 1/4" (38.7)
- Bottom panel height: 7/16" (1.1)
- Overall height: 27 1/4" (69.2) min cutout height
- Bottom right panel height: 5 1/8" (13.0)

Side View Dimensions:

- Overall depth: 23 1/8" (58.7)


Technical drawing of the front view of the cabinet. The overall width is 24 3/4" (62.8). The overall height is 28 11/16" (72.8). The top panel has a width of 14 15/16" (38.1) and a height of 6 3/8" (16.2). The top panel is divided into two sections: a left section of 1 7/16" (3.6) and a right section of 8 3/8" (21.4). The right section has a height of 1 7/8" (4.7). The bottom panel has a height of 3 1/2" (8.8).

Diagram illustrating the top view of the oven with dimensions and door clearance:

- Overall width: 28 1/2" (72.4)
- Left side clearance: 5/8" (1.7)
- Right side clearance: 5/8" (1.7)
- Internal width (excluding side clearances): 10 1/2" (26.6)
- Overall height: 27 5/16" (69.3)
- Height of the upper section: 8 3/8" (21.4)
- Height of the lower section: 2 9/16" (6.5)
- Minimum clearance below the oven: 20 9/16" (52.2) min
- Label: TOP VIEW
- Label: OPEN OVEN DOOR SHOWING DOOR CLEARANCE


Product Specification Created 10/19

WALL INSTALLATION

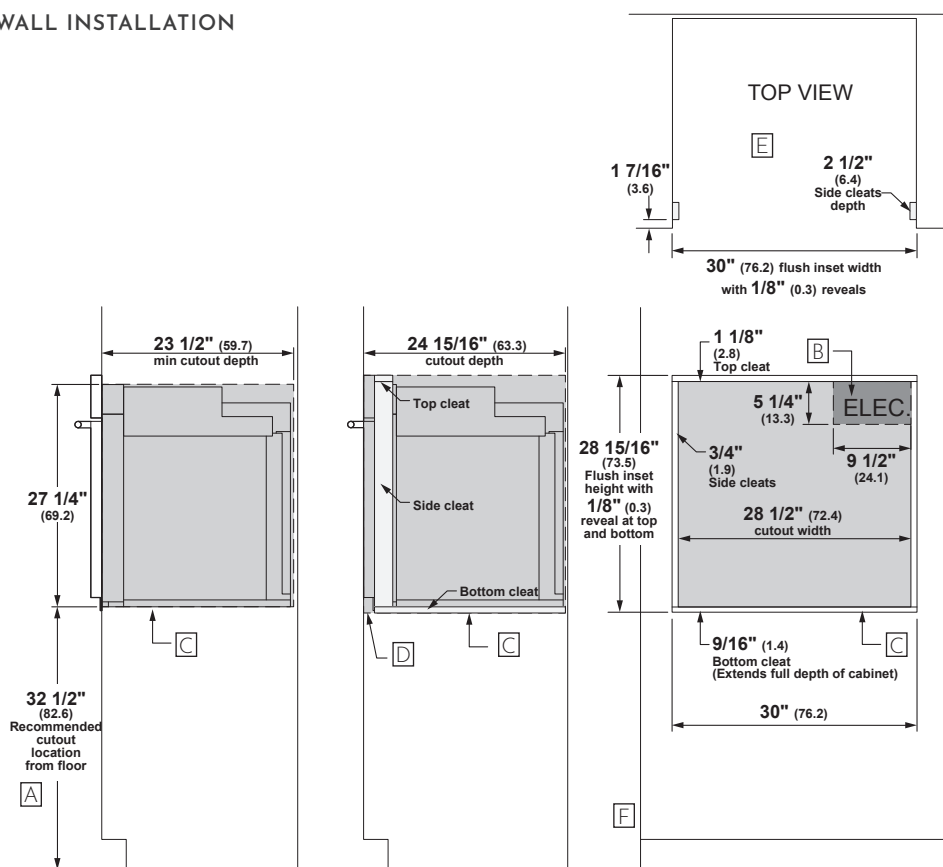

Allow 1/8" (0.3 cm) clearances from side edges of oven door.

UNDERCOUNTER INSTALLATION

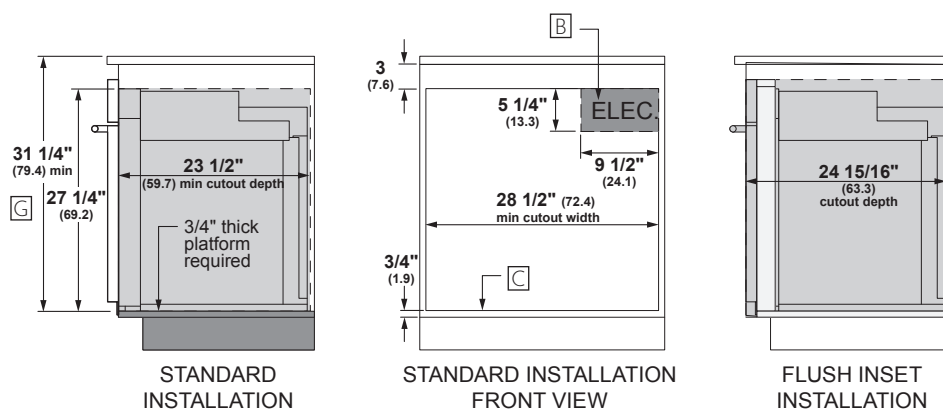


HELPFUL TIPS

- A** Based on a user height of 5' 6" to 5' 10"
- B** Junction box location (May also be located in adjacent cabinet.)
- C** Platform must be able to support 220 lbs (99 kg)
- D** Cabinet surfaces must be an appearance finished surface for flush installation.
- E** Cleats may be visible and should be finished to match cabinetry.
- F** If using optional flush install vent trim accessory ZX30VT1, please adjust cutout height to 28-5/8" and bottom cleat height to 1/4".
- G** Minimum 31 1/4" from the top surface of the countertop to the top surface of the wall oven support platform when installed beneath a certified cooktop.


For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

INSTALLATION WITH ADVANTIUM AND WARMING DRAWER

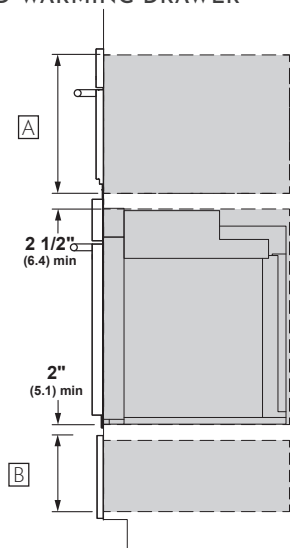


STANDARD INSTALLATION
SIDE VIEW

SIDE BY SIDE INSTALLATION

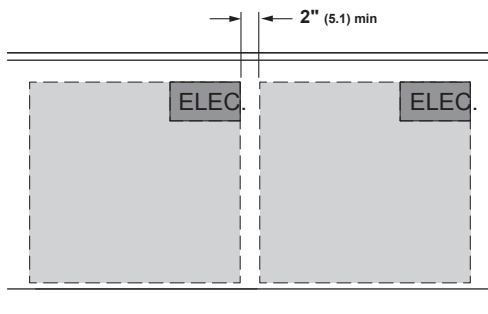


SIDE-BY-SIDE INSTALLATION
FRONT VIEW OF CUTOUTS

UNDER COOKTOP INSTALLATION

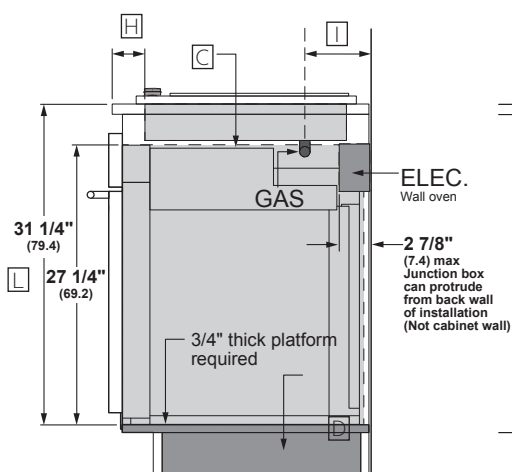

STANDARD INSTALLATION
SIDE VIEW

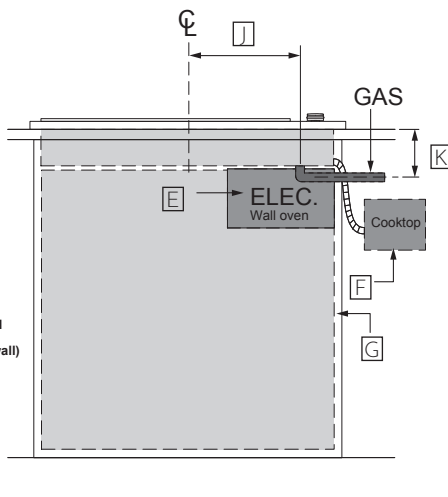

FRONT VIEW

HELPFUL TIPS

- [A] Dimensions per Advantium or Microwave Oven requirements
- [B] Dimension per Warming Drawer requirements
- [C] Note this oven is only approved to be installed under specific models as labeled on this unit.
- [D] Support platform made of 3/4" (1.9 cm) wood is required. Must be capable of supporting 220 lbs (99 kg). Support Platform base to be same height as toe kick.
- [E] Junction box location for wall oven. (May also be located in adjacent cabinet).
- [F] Gas regulator and electric connections for cooktops must be located in an adjacent accessible location to the right
- [G] Top and/or side fillers may be necessary if unit is positioned between existing cabinets. Be sure they are attached securely, since they will anchor the oven in the cabinet.
- [H] For flush oven installations, the cooktop cutout must be set back 2 1/2" (6.4 cm) plus the cleat setback.
- [I] Dimension varies based on model.
example:
ZGU36 5 1/2" (14.0 cm) (from wall)
ZGU30 4 5/16" (11.0 cm) (from wall)
- [J] Dimension varies based on model.
example:
ZGU36 0" (centerline)
ZGU30 12 1/16" (30.6 cm) (centerline)
- [K] Dimension varies based on model
ZGU36: 5 1/2" (13.9 cm) requires use of a 90° 1/2" FPT x 1/2" FL brass street elbow
ZGU30: 5" (12.7 cm)
- [L] From the top surface of the countertop to the top surface of the wall oven support platform

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.



SPECIFICATIONS

Overall Width	36" (91.4)
Overall Depth	20 3/8" (51.8 cm)
Overall Height	4 5/8" (11.8 cm)
Cut-out Width	33 7/8" (86.0 cm)
Cut-out Depth	19 1/8" (48.6 cm)
Conduit Length	48" (122 cm)
Electrical Rating	11,600W at 240V/60Hz 10,100W at 208V/60Hz

Recommended Circuit Breaker Size	50 Amps
Net Weight	48 lbs. (21.8 kg)
Approx. Shipping Weight	58 lbs. (27.6 kg)

OPTIONAL ACCESSORIES


Precision Cooking Kit	JXSOU5V1
Flush-Mount Kit	JXFLUSH1

ATTENTION ELECTRICIAN:


This cooktop is provided with a 48" flexible conduit and must be hard wired (direct wired) into an approved junction box and be properly grounded. It is not permitted to use a "plug and receptacle" type installation on this cooktop.

Use a two-wire, three conductor 208/240 VAC, 60 Hertz electrical system. A white (neutral) wire is not needed for this cooktop.


OVERALL DIMENSIONS

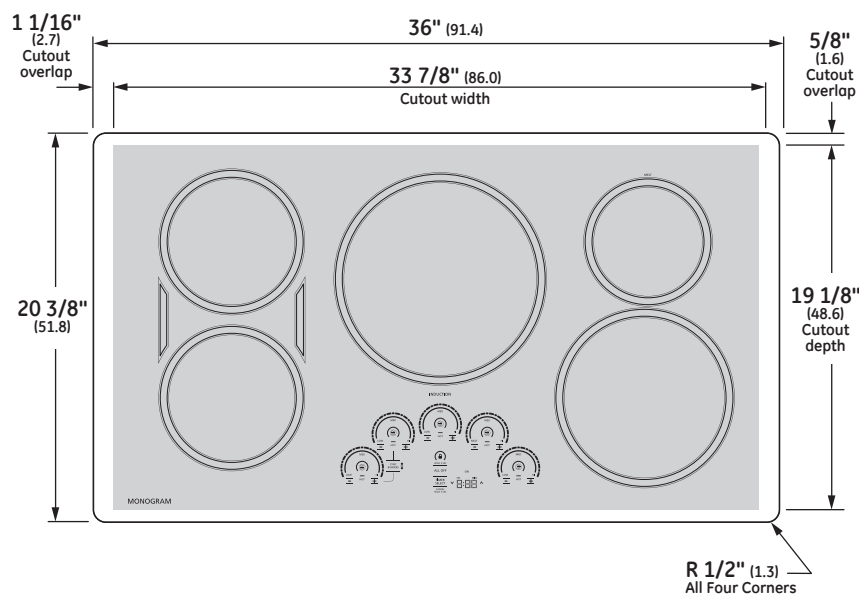

TOP VIEW (SHOWING CUTOUT OVERLAP)

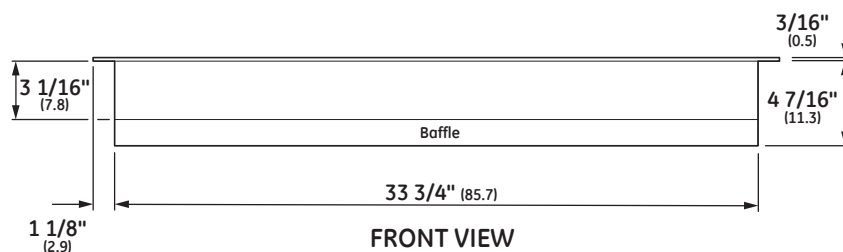

FRONT VIEW

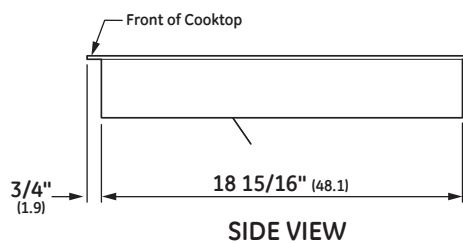

SIDE VIEW


Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.

For more details refer to the installation instructions for this product.

ELEVATE EVERYTHING™

MONOGRAM


INSTALLATION

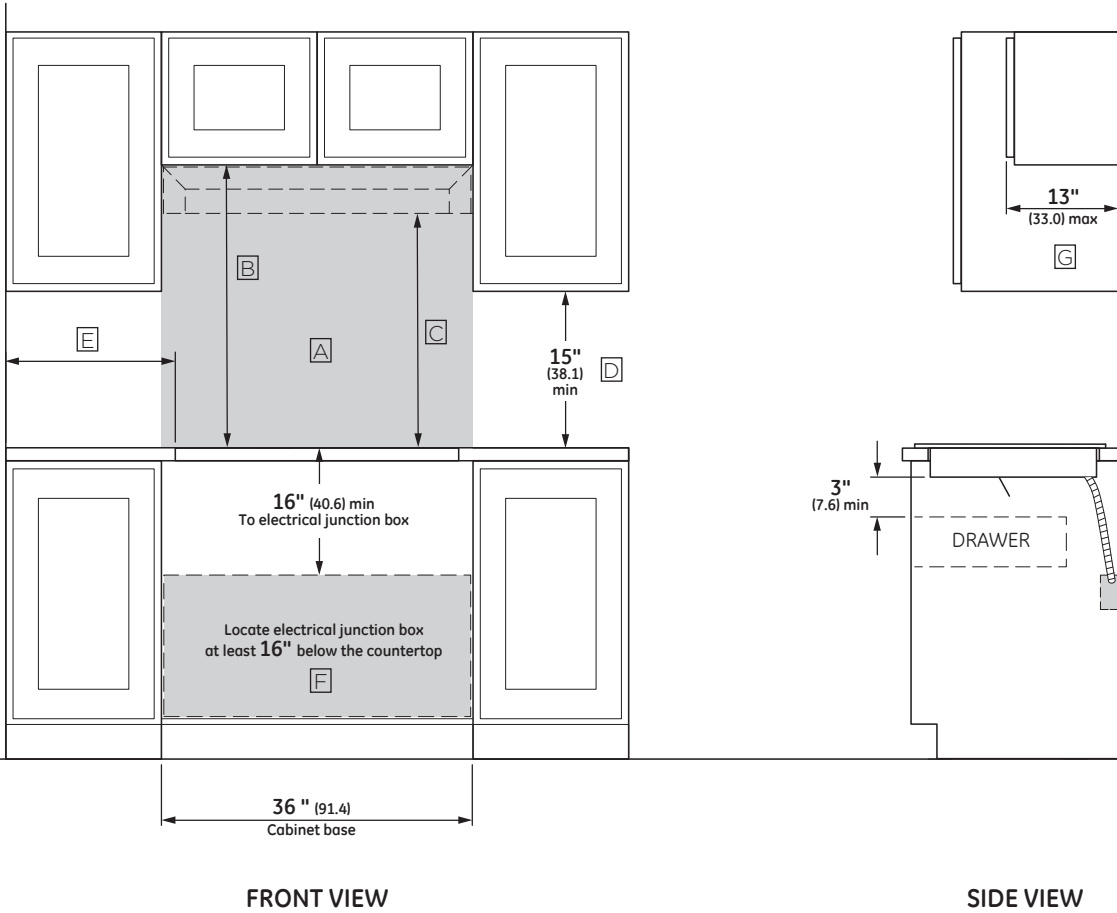


NOTES

- A Wall coverings, countertop and cabinets surrounding cooktop must be able to withstand temperatures of up to 200°F.
- B Minimum 30" clearance from countertop to unprotected overhead surfaces, when no ventilation hood or microwave oven is installed.
- C When using a ventilation hood or microwave oven above the cooktop, see hood or microwave installation instructions for minimum overhead clearance dimensions.
- D Minimum 15" of clearance from countertop to nearest overhead surface on both sides of cooktop. Make sure to include any lighting rail covers in calculation.
- E Minimum 2" distance from edge of cutout to nearest adjacent side wall below upper cabinets.
- F Install an approved junction box where it can be easily reached through the front of the cabinet where the cooktop is located. IMPORTANT: For serviceability, the junction box must be located where it will allow considerable slack in the 48" long conduit.
- G Maximum 13" depth of unprotected overhead surfaces, when no ventilation hood or microwave oven is installed.
- H For Americans with Disabilities Act (ADA) forward approach installation: Minimum 5" clearance between the top of the countertop and the enclosure. The enclosure must be made of at least 1/4" thick wood material, and must have an access panel installed in order to provide access to the junction box and hold-down brackets, and to allow for service of the cooktop.

COUNTERTOP CUT-OUT DIMENSIONS

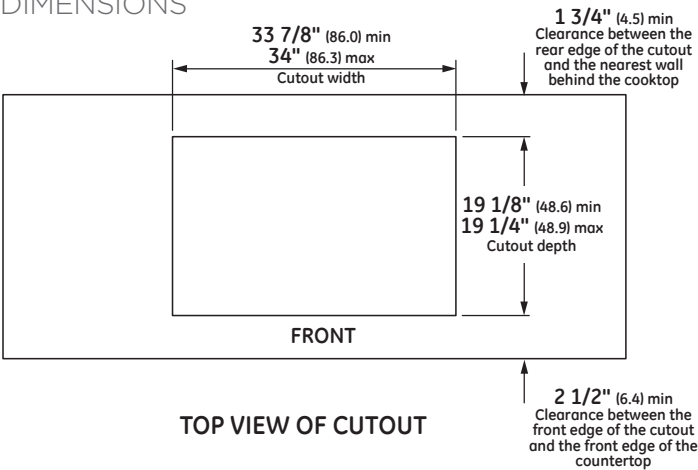

ADA INSTALLATION

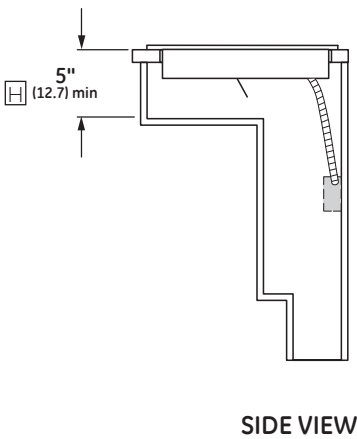


ELEVATE EVERYTHING™

MONOGRAM

Dimensions in parentheses are in centimeters unless otherwise noted.

For more details refer to the installation instructions for this product.


INSTALLATION ABOVE WALL OVEN

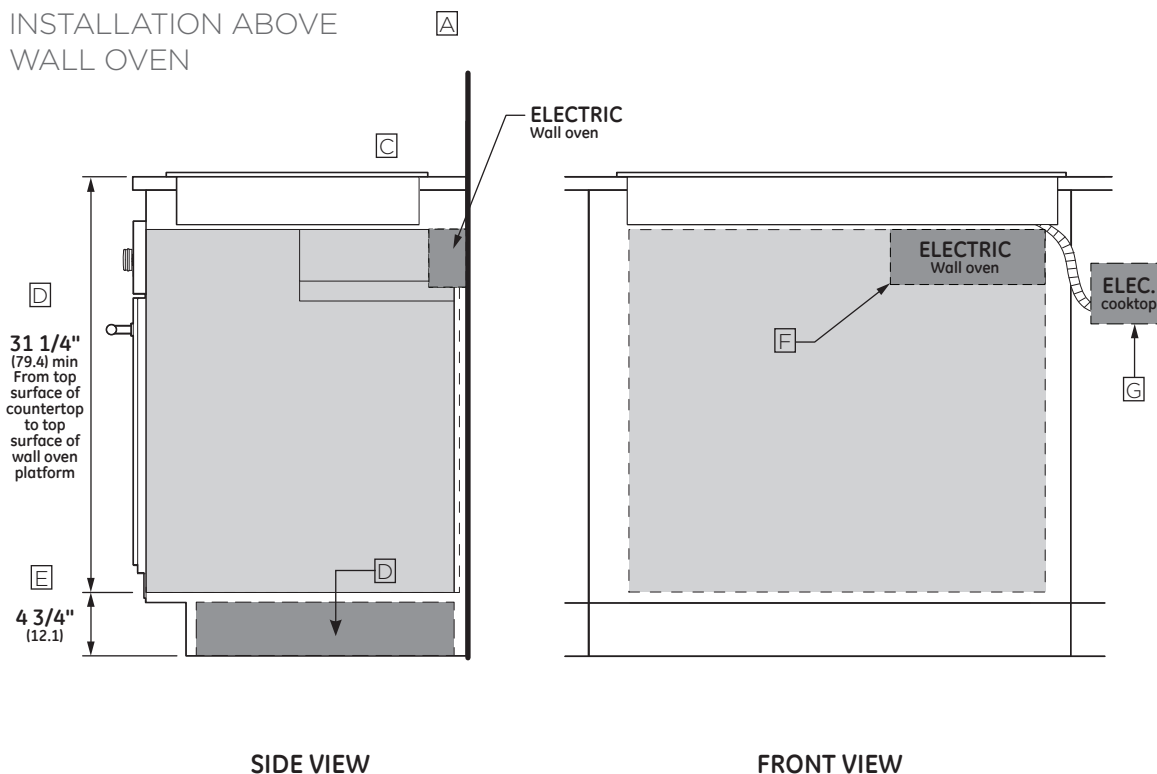

NOTES

- A** Note this cooktop is only approved for installation above specific wall ovens as labeled on this unit.
- B** Warming drawers are approved for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer or underside of the cooktop for approved combinations.
- C** When installing this cooktop above a single wall oven, do not install the baffle.
- D** Maintain a minimum distance of 31-1/4" from the top surface of the countertop to the wall oven platform to ensure that the cooktop and wall oven do not interfere with each other (see picture).
- E** The cooktop platform must be a minimum height of 4-3/4" from the floor to ensure that the handle does not hit the floor when the door is open.
- F** Junction box location for wall oven (may also be located in adjacent cabinet).
- G** Electrical connection for cooktop must be located in an accessible adjacent location to the right (may also be located in adjacent cabinet).
- H** When installing the cooktop above a warming drawer, a solid barrier must be installed at least 5" from the top of the countertop. Use any solid material such as 1/4" thick plywood. Allow at least a 2" air gap between the front of the barrier and the inside of the cabinet and at least 1/4" air gap between the barrier and the top of the warming drawer.

INSTALLATION ABOVE WARMING DRAWER

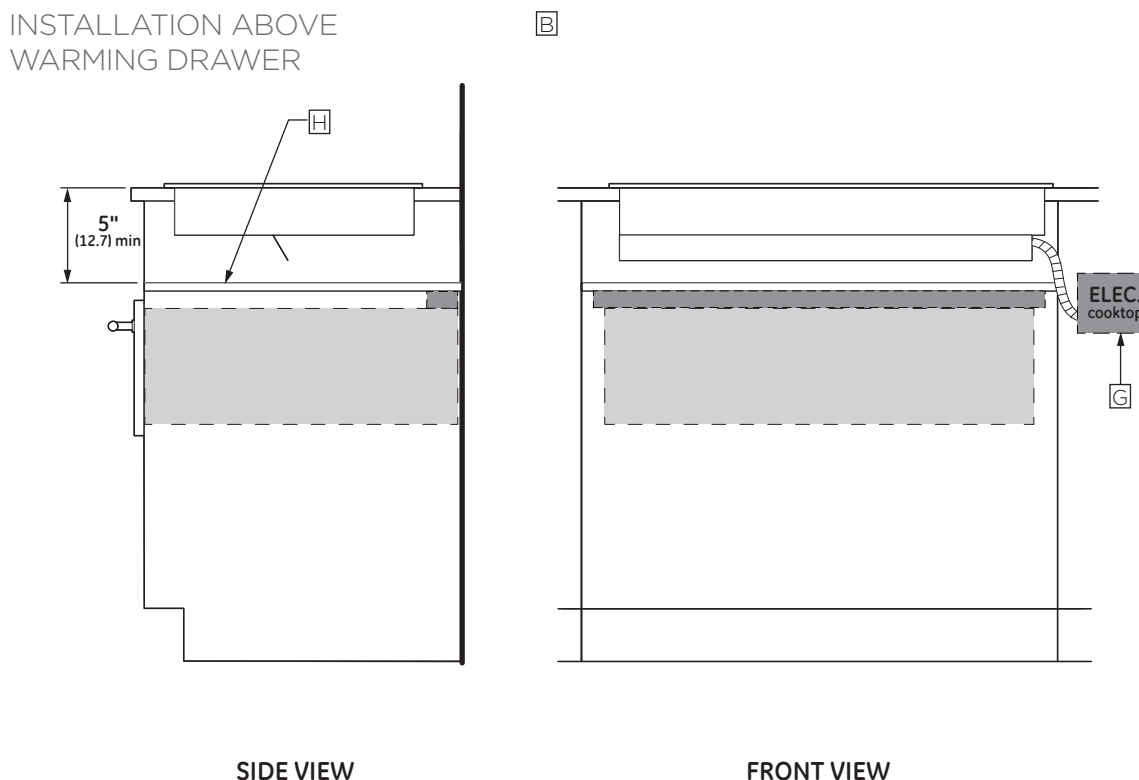



ELEVATE EVERYTHING™

MONOGRAM

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

For more details refer to the installation instructions for this product

FLUSH MOUNT INSTALLATION

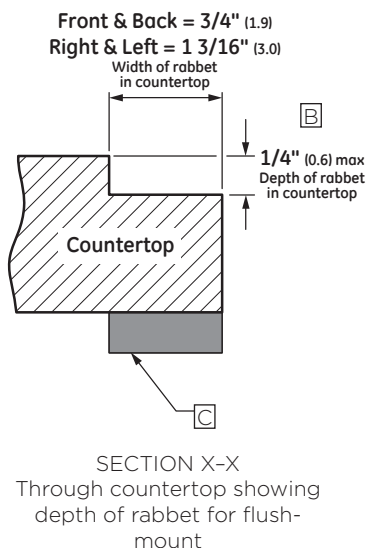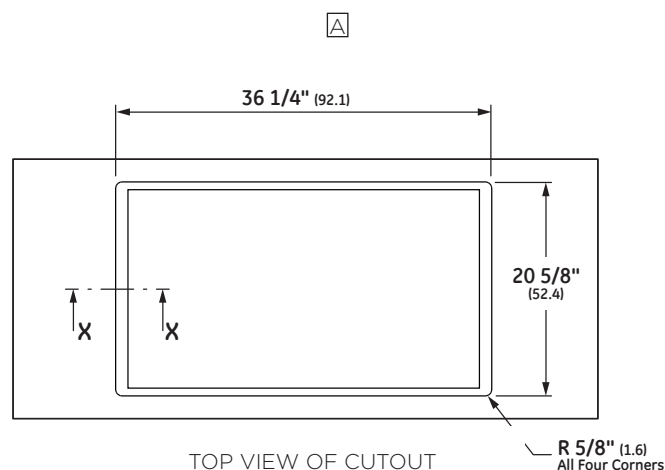

NOTES

A Use optional JXFLUSH1 kit to flush-mount the cooktop into the countertop. Read all installation instructions supplied with cooktop and kit before beginning installation.

B To avoid hot cookware from contacting the countertop surface, the cooktop should be installed at least $\frac{1}{32}"$ higher than the countertop.

C Use strips of wood or solid-surface countertop material to reinforce the countertop below the flush-mount rabbet. For an island or peninsular installation secure strips to all four sides, otherwise just secure strips to the front and back under the cutout.

D Note this cooktop is only approved for installation above specific wall ovens as labeled on this unit.

E When installing this cooktop above a single wall oven, do not install the baffle.

F When this cooktop is installed above a flush-mounted wall oven, the clearance from the front edge of the countertop to the front edge of the cooktop cutout is minimum $2\frac{1}{2}"$ plus the wall oven cleat setback.


G The cooktop platform must be a minimum height of $4\frac{3}{4}"$ from the floor to ensure that the handle does not hit the floor when the door is opened.

H Warming drawers are approved for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer or underside of the cooktop for approved combinations.


I When installing the cooktop above a warming drawer, a solid barrier must be installed at least $5\frac{1}{2}"$ from the top of the countertop. Use any solid material such as $\frac{1}{4}"$ thick plywood. Allow at least $\frac{1}{4}"$ air gap between the barrier and the top of the warming drawer.

For more details refer to the installation instructions for this product

FLUSH-MOUNT INSTALLATION ABOVE WALL OVEN

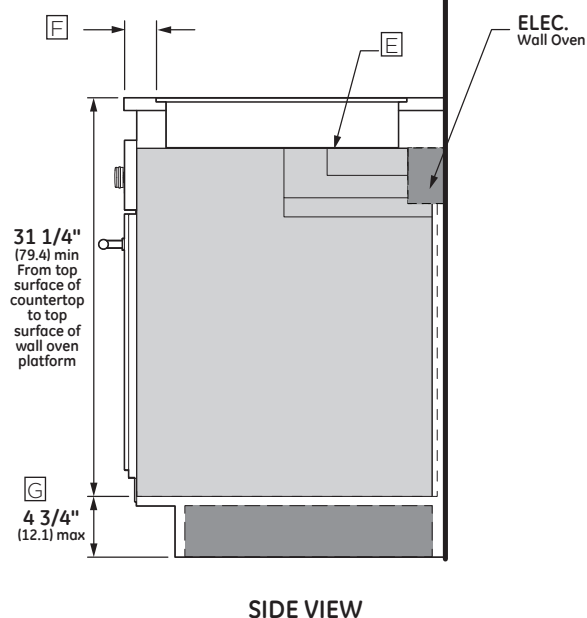

FLUSH-MOUNT INSTALLATION ABOVE WARMING DRAWER

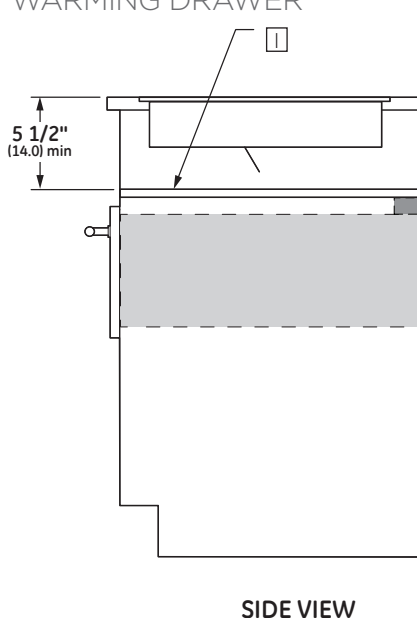

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

ELEVATE EVERYTHING™

MONOGRAM

FEATURES AND BENEFITS

GLIDE TOUCH CONTROLS

Easy to use electronic controls allow you to precisely raise or lower heat in an instant with one easy swipe

FIVE INDUCTION COOKING ELEMENTS

Enjoy a new level of rapid, precise heating with a cool-to-the-touch surface that's easy to clean

11" 3700W INDUCTION ELEMENT

Rapidly boil water with our most powerful induction element

SYNCBURNERS

Control two 7" elements simultaneously to evenly heat large cookware or the included griddle

STAINLESS STEEL CLAD ALUMINUM GRIDDLE

Achieve even results with this lightweight griddle, tailored to fit Monogram SyncBurners

MELT SETTING

Gently melt delicate foods without burning or scorching

MULTI-ELEMENT TIMER

Manage up to five pans at once with individual timers for each element

CONTROL LOCK CAPABILITY

Protects against unintended activation

CUSTOM SETTINGS

Personalize your cooktop settings to fit your cooking style

PAN PRESENCE & SIZE SENSORS

Cook efficiently with elements that heat to the size of your pan and shut off when no pan is present

WHITE LED DISPLAY WITH PATTERNED SILVER

GLASS SURFACE

Enjoy a premium look that blends in with modern kitchen finishes

FLUSH-MOUNT CAPABLE

Optional accessory kit enables the cooktop to be flush inset into the countertop for a sleek, modern look

PRECISION COOKING

Achieve restaurant quality results with an optional probe that wirelessly controls the temperature of your food. Ideal for Sous Vide, Slow Cooking, making candy, etc., or for any other cooking that requires precise control of temperature over time



ELEVATE EVERYTHING™

MONOGRAM



SPECIFICATIONS

Overall Width	36 1/8" (91.5 cm)
Overall Depth	20 7/8" (53.0 cm)
Overall Height	6" (15.2 cm)
Cut-out Width	33 7/8" (86.0 cm)
Cut-out Depth	19 1/8" (48.6 cm)
Conduit Length	48" (122 cm)
Electrical Rating	10,800W at 240V/60Hz 8,100W at 208V/60Hz
Recommended Circuit Breaker Size	50 Amps
Net Weight	45 lbs. (20.5 kg)
Approx. Shipping Weight	55 lbs. (25.0 kg)

ATTENTION ELECTRICIAN:

This cooktop is provided with a 48" flexible conduit and must be hard wired (direct wired) into an approved junction box and be properly grounded. It is not permitted to use a "plug and receptacle" type installation on this cooktop.

Use a two-wire, three conductor 208/240V AC, 60 Hertz electrical system. A white (neutral) wire is not needed for this cooktop.


The cooktop must be installed in a circuit that does not exceed 125V AC nominal to ground.

For more details refer to the installation instructions for this product.


ELEVATE EVERYTHING™

MONOGRAM


OVERALL DIMENSIONS

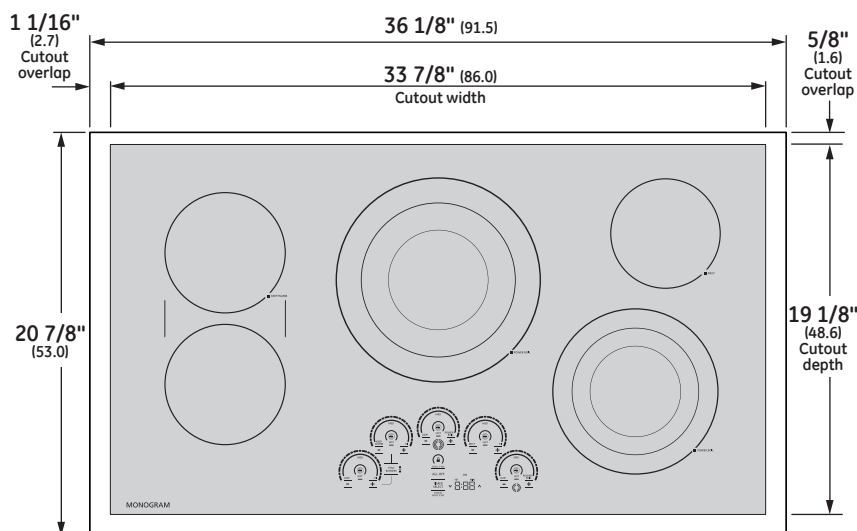

TOP VIEW (SHOWING CUTOUT OVERLAP)

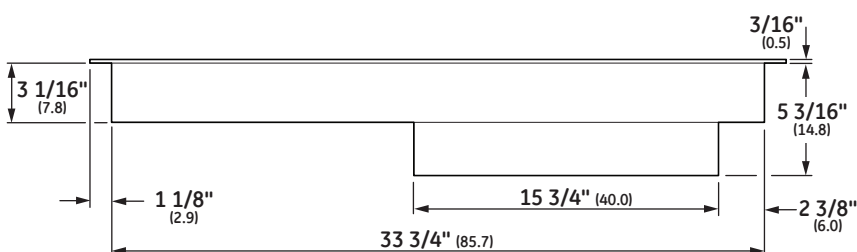


FRONT VIEW

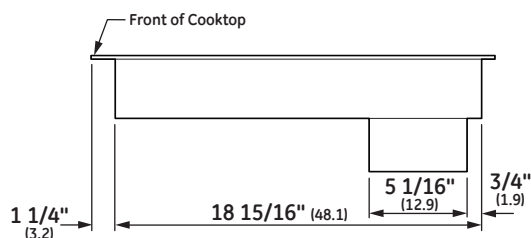

SIDE VIEW

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


STANDARD INSTALLATION

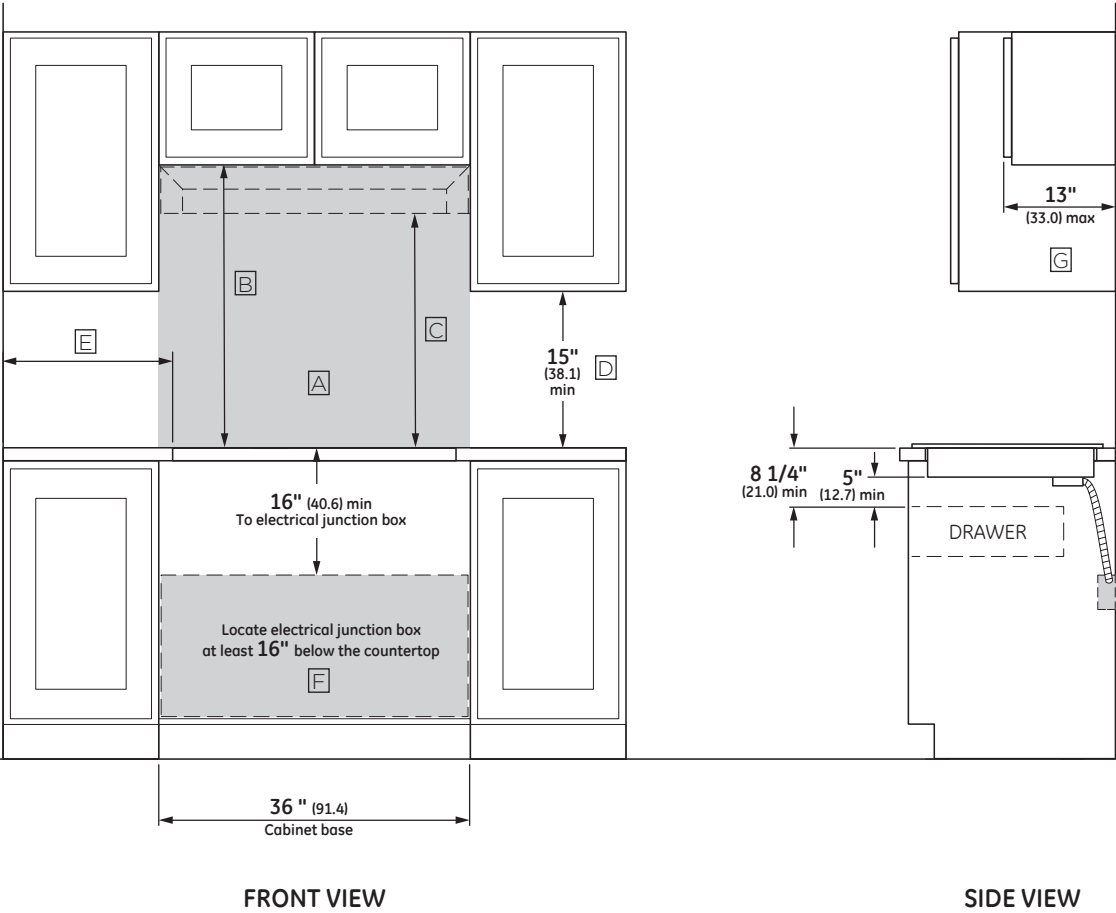


NOTES

- A Wall coverings, countertop and cabinets surrounding cooktop must be able to withstand temperatures of up to 200°F.
- B Minimum 30" clearance from countertop to unprotected overhead surfaces, when no ventilation hood is installed.
- C When using a ventilation hood above the cooktop, see hood installation instructions for minimum overhead clearance dimensions.
- D Minimum 15" of clearance from countertop to nearest overhead surface on either side of cooktop. Make sure to include any lighting rail covers in calculation.
- E Minimum 2" distance from edge of cutout to nearest adjacent side wall below upper cabinets.
- F Install an approved junction box where it can be easily reached through the front of the cabinet where the cooktop is located. **IMPORTANT:** For serviceability, the junction box must be located where it will allow considerable slack in the 48" long conduit.
- G Maximum 13" depth of unprotected overhead surfaces, when no ventilation hood is installed.
- H For Americans with Disabilities Act (ADA) forward approach installation: Minimum 6-1/2" clearance between the top of the countertop and the enclosure. The enclosure must be made of at least 1/4" thick wood material, and must have an access panel installed in order to provide access to the junction box and hold-down brackets, and to allow for service of the cooktop.

COUNTERTOP CUT-OUT DIMENSIONS

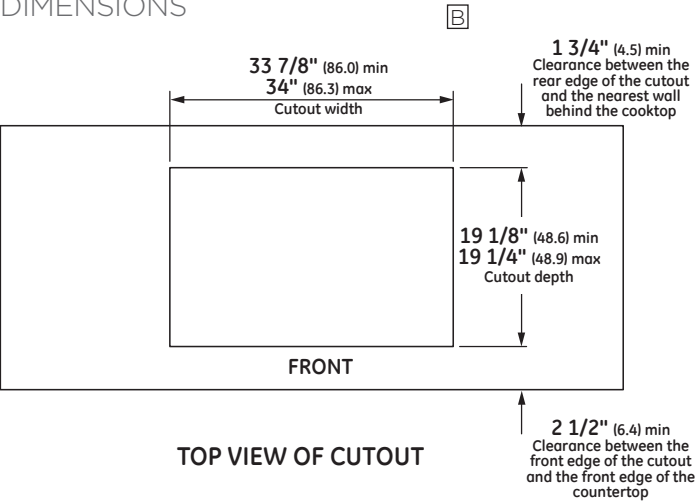

ADA INSTALLATION

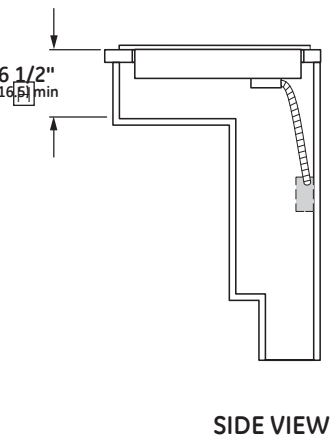


Dimensions in parentheses are in centimeters unless otherwise noted.

ELEVATE EVERYTHING™




INSTALLATION ABOVE WALL OVEN

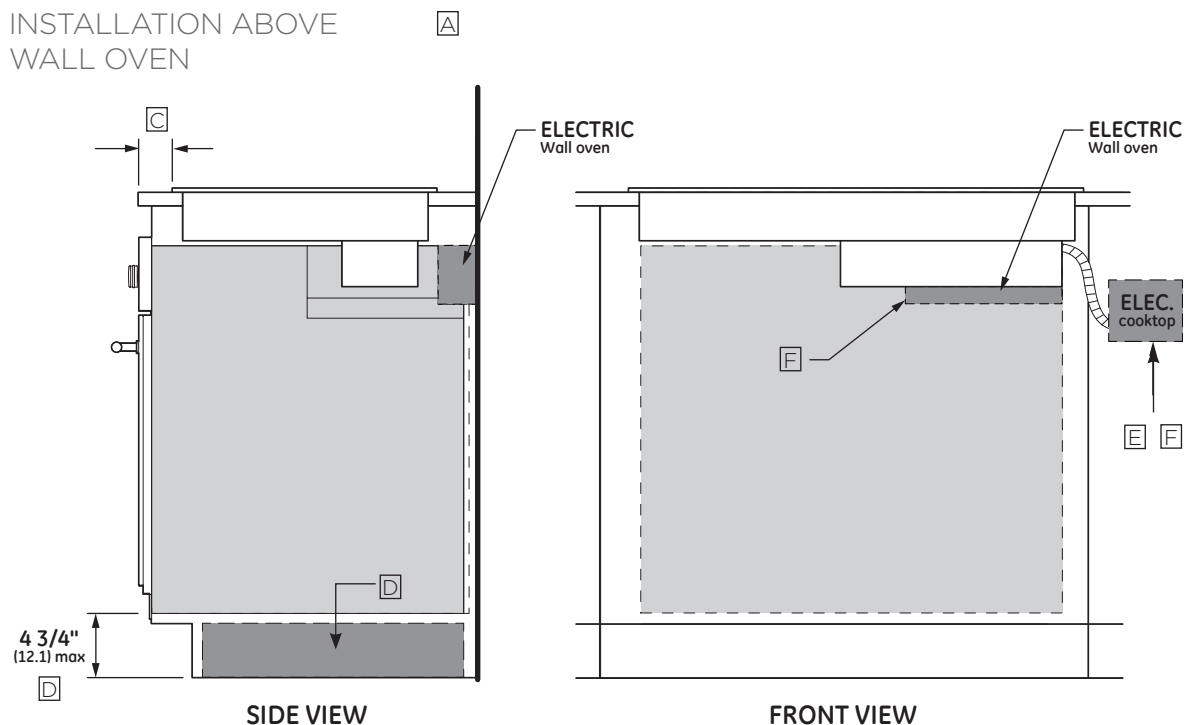

NOTES

- A** Note this cooktop is only approved for installation above specific wall ovens as labeled on this unit.
- B** Warming drawers are approved for installation below only certain specified cooktop models. See the label attached to the top of the warming drawer or underside of the cooktop for approved combinations.
- C** When this cooktop is installed above a flush-mounted wall oven, the clearance from the front edge of the countertop to the front edge of the cooktop cutout is minimum 2-1/2" plus the wall oven cleat setback.
- D** Maximum toe kick height of 4" when installed above a certified wall oven (4-3/4" including thickness of support platform).
- E** Junction box location for wall oven (may also be located in adjacent cabinet).
- F** Electrical connection for cooktop must be located in an accessible adjacent location to the right (may also be located in adjacent cabinet).
- G** When installing the cooktop above a warming drawer, a solid barrier must be installed at least 6-1/2" from the bottom of the countertop. Use any solid material such as 1/4" thick plywood. Allow at least 1/4" air gap between the barrier and the top of the warming drawer.

INSTALLATION ABOVE WARMING DRAWER

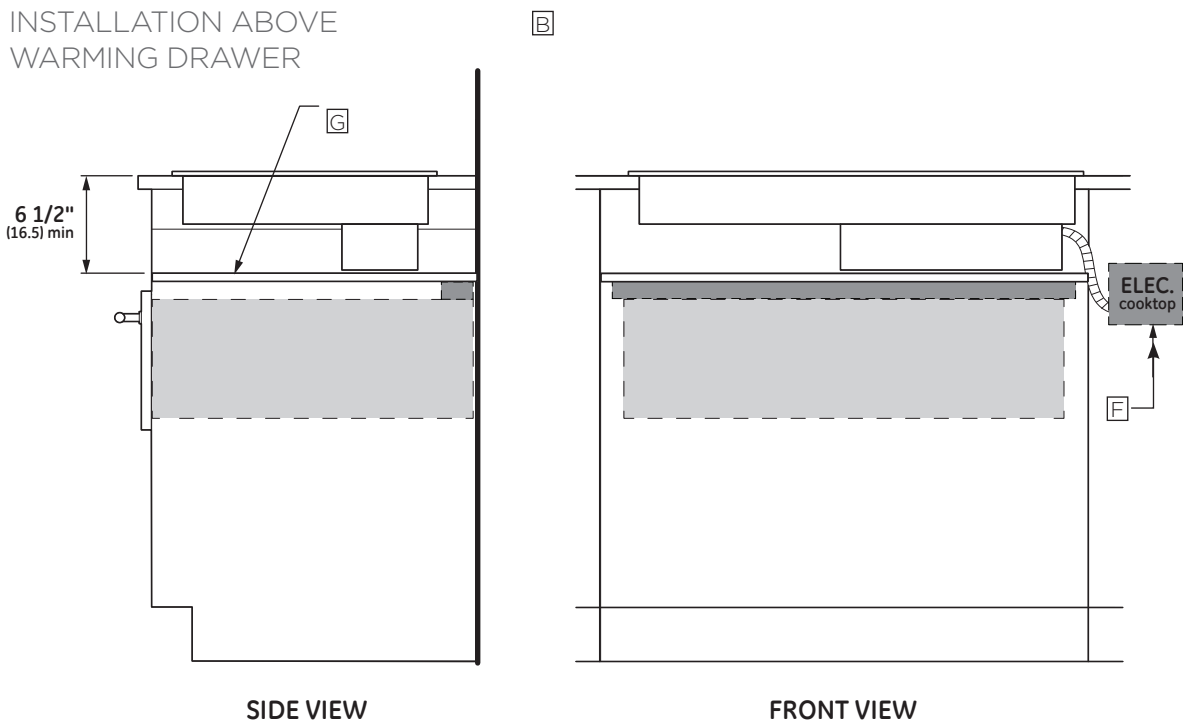

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

ELEVATE EVERYTHING™

MONOGRAM

FEATURES AND BENEFITS

GLIDE TOUCH CONTROLS

Easy to use electronic controls allow you to precisely raise or lower heat in an instant with one easy swipe

FIVE RADIANT COOKING ELEMENTS

Cook foods quickly and evenly on a sleek, glass surface

12"/9"/6" 3600W POWER BOIL ELEMENT

Flexible triple element allows you to use different pan sizes on a single location that produces very rapid powerful heat

9"/7"/5" 3000W POWER BOIL ELEMENT

Flexible triple element allows you to use different pan sizes on a single location that produces rapid powerful heat

SYNCBURNERS

Control two 7" elements simultaneously to evenly heat large cookware or the included griddle

STAINLESS STEEL CLAD ALUMINUM GRIDDLE

Achieve even results with this lightweight griddle, tailored to fit Monogram SyncBurners

KEEP WARM SETTING

Keep food warm with our lowest heat setting, while still boiling water in minutes with this fully functional 6" element

MELT SETTING

Gently melt delicate foods without burning or scorching

MULTI-ELEMENT TIMER

Manage up to five pans at once with individual timers for each element

CONTROL LOCK CAPABILITY

Protects against unintended activation

CUSTOM SETTINGS

Personalize your cooktop settings to fit your cooking style

RED AND WHITE LED DISPLAY WITH PATTERNED BLACK GLASS SURFACE

Elegant and easy to read

STAINLESS STEEL FRAME

Completely surrounds the cooktop surface to complement all other stainless steel appliances



ELEVATE EVERYTHING™

MONOGRAM

MONOGRAM 30" BUILT-IN ADVANTIUM® 120 ZSB9132NSS



THE MONOGRAM STATEMENT COLLECTION

Edge-to-edge handles, polished stainless steel and hand finished edges convey a sense of solidity and beauty

5-IN-1-OVEN

Experience exceptional flexibility and cooking results with this innovative five-in-one oven. Advantium® Technology enhanced, it can be used as a convection oven, toaster oven, warming/proofing oven, precision cook oven, and microwave

POWERFUL PERFORMANCE

Oven-quality foods cook up to four times faster than a conventional oven, with no preheating required

SPEEDCOOK TECHNOLOGY

Offering the ultimate in cooking speed and flexibility, the halogen-lighting system combines with microwave technology to Speedcook favorite foods to perfection in minutes, with no preheating

SPACIOUS INTERIOR

Generous, 1.7-cu.-ft oven space with a large 16" turntable allows for full rotation of a 9" x 13" casserole dish; plus the removable oven rack offers the convenience of multi-level cooking

PREPROGRAMMED RECIPES

Provide quick and easy programming of over 175 pre-set food selections and allows programming of up to 30 custom recipes

INSTALLATION FLEXIBILITY

Ovens can be installed in 30" wall cabinet and can also be installed undercounter

LCD CONTROLS

Allow you to adjust oven settings with little effort




SPECIFICATIONS

Overall Width	29 3/4" (75.6 cm)
Overall Height	20 1/4" (51.4 cm)
Overall Depth	23" (58.4 cm)
Oven Door Clearance	13 1/4" (33.6 cm)
Overall Oven Interior Capacity	1.7 cu. ft.
Oven Interior Dimensions (W x H x D)	20 1/16" x 8 1/2" x 17" (51 cm x 21.6 cm x 43.2 cm)
Minimum Cabinet Width	30" (76.2 cm)
Minimum Cabinet Depth	21 1/2" (54.6 cm)
Minimum Base Support	130 lbs (59 kg)
Cutout Width	25 1/4" (64.1 cm)
Cutout Height	17 1/2" (44.5 cm)
Cutout Depth	21 1/2" (54.6 cm) Min
Voltz/Hertz/Amps	120 VAC, 60 Hz, 15A
Conduit Length	48 1/2" (123.2 cm)
Electrical Rating	1.8 kW at 120V
Total Amps	15 amps
Shipping Weight	92 lbs (41.7 kg)


ATTENTION ELECTRICIAN:

A 120V, 60Hz, 15 Amp circuit is required. An individual properly grounded branch circuit or circuit breaker is required. Hardware junction box is required for built-in product.


OVERALL DIMENSIONS

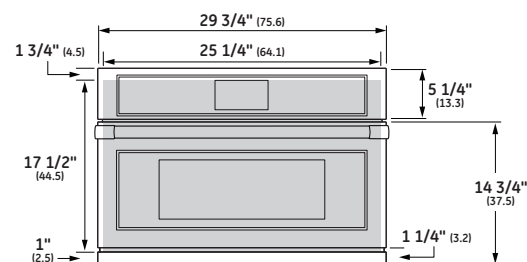

FRONT VIEW (SHOWING CUTOUT OVERLAP)

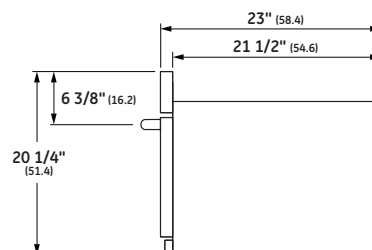

SIDE VIEW

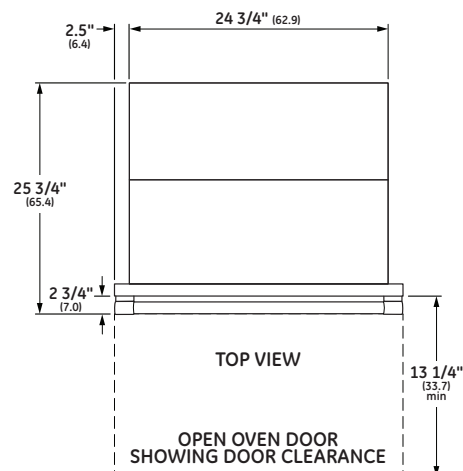


TOP VIEW

OPEN OVEN DOOR
SHOWING DOOR CLEARANCE

Dimensions in parentheses are in centimeters unless otherwise noted. Actual product dimensions may vary due to manufacturing tolerances.


WALL INSTALLATION

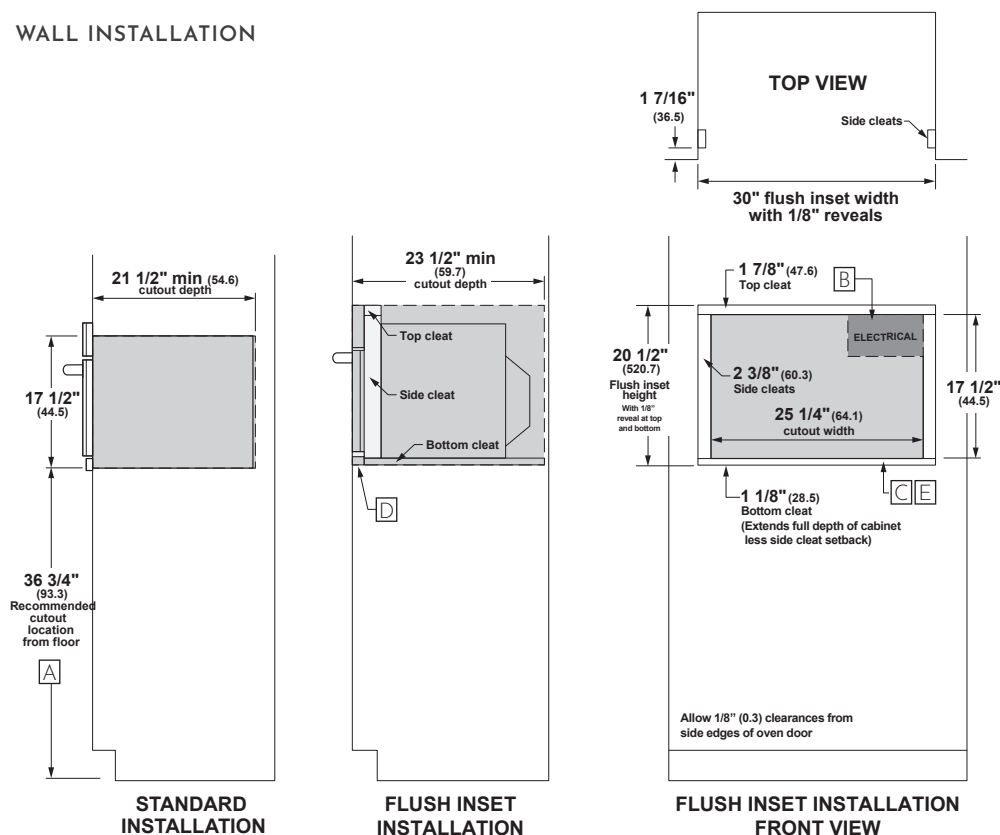

HELPFUL TIPS

- A** Based on a user height of 5' 6" to 5' 10"
- B** Junction box location (May also be located in adjacent cabinet.)
- C** Platform must be able to support 130 lbs (59 kg)
- D** Top surface of cabinet must be an appearance finished surface for flush installation.
- E** Cleats may be visible and should be finished to match cabinetry.
- F** Maximum toe kick height of 4" when installed beneath a certified cooktop.


UNDERCOUNTER INSTALLATION

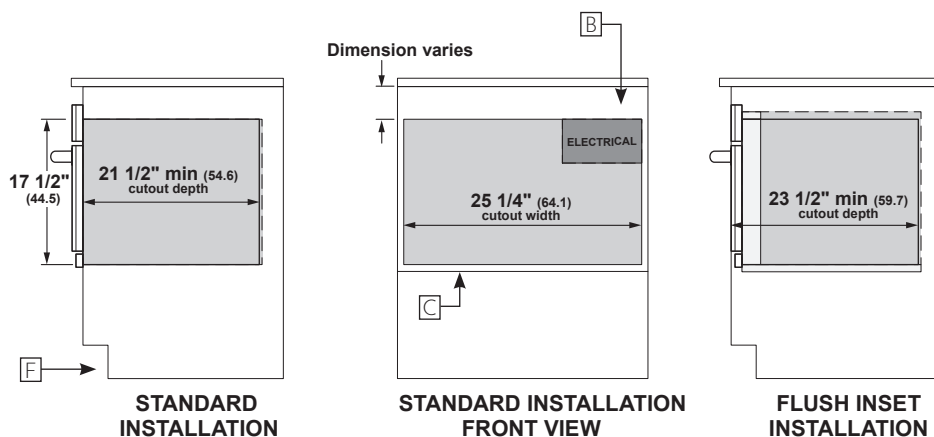

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

MONOGRAM 24" FULLY INTEGRATED DISHWASHER

ZDT985SPNSS

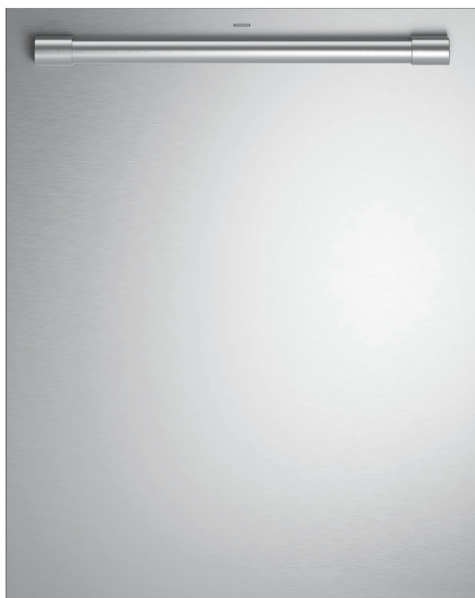

THE MONOGRAM STATEMENT COLLECTION

Polished stainless steel, and hand-finished edges convey a sense of solidity and beauty

ADVANCED WASH SYSTEM

Designed to achieve the ultimate clean, this advanced wash system with over 90 powerful jets delivers complete washing coverage to every corner of the dishwasher

FULL-EXTENSION, ADJUSTABLE THIRD RACK WITH PREMIUM SLIDES

Convenient and adjustable, this expansive third rack easily accommodates an entire flatware collection, plus carving knives, soup ladles and other cooking/serving tools for the ultimate clean

39 DBA QUIET OPERATION

Is made possible by advancing sound-absorbing materials and a smooth-running motor

HARD FOOD DISPOSER

Designed to maintain a kitchen's cleanliness and efficiency, the hard food disposer with stainless steel blades grinds food into tiny particles that wash away with ease

DEEP CLEAN SILVERWARE JETS

Powerful jets blast away stuck-on food for silverware that's always spotless

BOTTLE JETS

Hard-to-reach areas inside tall items get completely clean with four dedicated jets integrated into the upper rack that shower water deep inside for the ultimate clean

LED LIGHTING


Illuminates the entire interior, leaving no question as to whether or not dishes have been cleaned

MAX DRY SYSTEM

This precise and efficient drying system delivers beautifully dry dishes every time and is perfect for hard-to-dry items like your favorite champagne flutes

FLUSH INSTALLATION CAPABILITY




Enables the dishwasher to be installed flush, even with inset cabinetry, without any additional parts

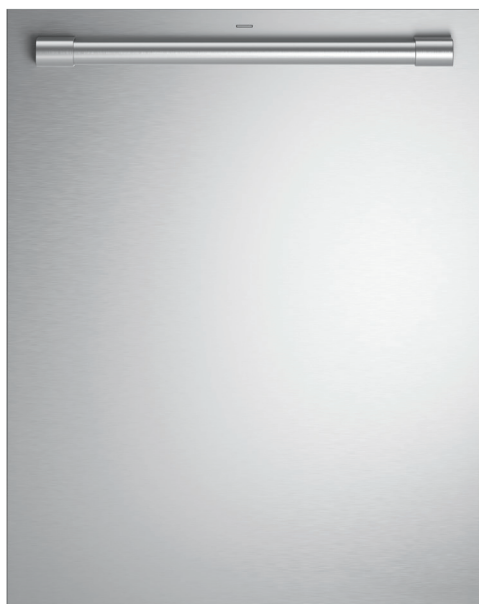

SPECIFICATIONS


Overall Width	23 3/4" (60.3 cm)
Overall Height	33 3/8" (84.8 cm) Min 34 5/8" (88.0 cm) Max
Overall Depth	24" (61 cm)
Door Clearance	25 1/2" (64.8 cm)
Overall Dishwasher Capacity	16 Place Settings
Minimum Cabinet Width	24" (61 cm)
Minimum Cabinet Depth	24" (61 cm)
Cutout Width	24" (61 cm)
Cutout Height	33 1/2" (85.1 cm) Min 34 3/4" (88.3 cm) Max
Electrical Requirements	10.2 A
Hose Length	No more than 12' (3.7 m)
Voltz/Hertz/Amps	115 V, 60 Hz, 15 or 20 amp circuit
Shipping Weight	139 lb (63 kg)

OVERALL DIMENSIONS

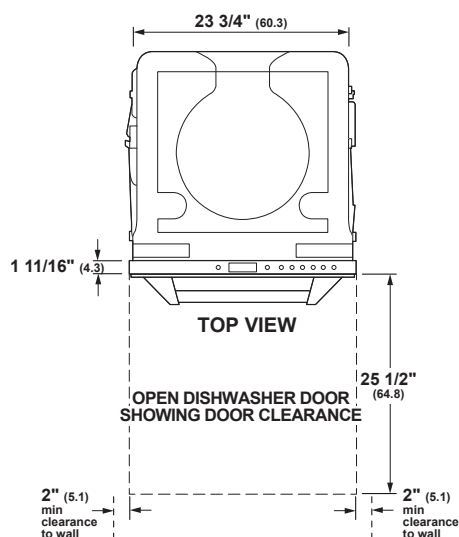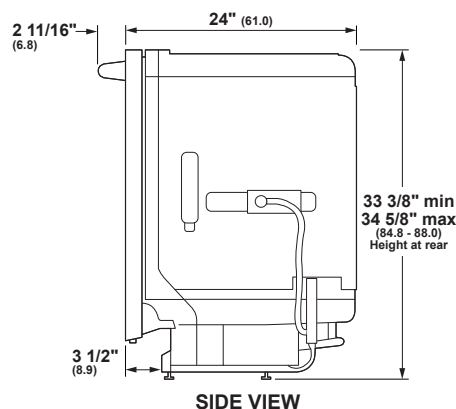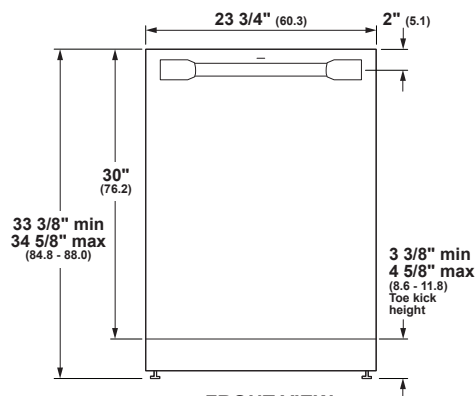

Dimensions in parentheses are in centimeters unless otherwise noted.
Actual product dimensions may vary due to manufacturing tolerances.

FLUSH CUTOUT INSTALLATION

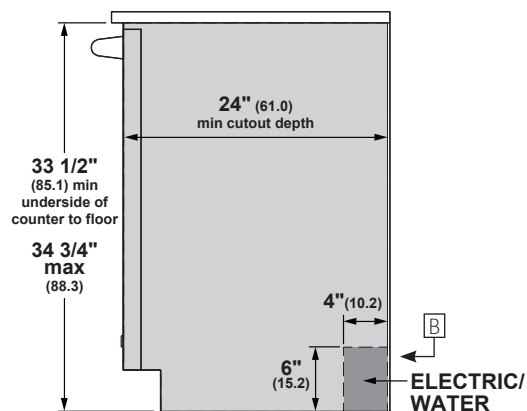

SPECIAL NOTES

- A** The dishwasher drain hose must be no more than 12 feet in length for proper drainage.
- B** Electrical connections are at the right front of the dishwasher and water connections are on the left. The hot water line should extend forward 30" to 40" from the rear wall. The electrical must extend forward at least 24" to reach the junction box.
- C** To prevent siphoning, an air gap or high drain loop must be used.

For more details, refer to the installation instructions for this product on Monogram.com. Dimensions in parentheses are in centimeters unless otherwise noted.

INSTALLATION CUTOUT FRONT VIEW

